





Report No.: EED31K000844 Page 1 of 6

TEST REPORT IEC TR 62778

Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires

Report Reference No..... EED31K000844

Compiled by (+ signature)..... Carrie Lin

Reviewed by (+ signature).....: Torres He

Approved by (+ signature)..... Amo Liu

Date of issue...... Apr. 04, 2018

Testing Laboratory...... Centre Testing International Group Co., Ltd.

Address...... Hongwei Industrial Zone, Bao an 70 District, Shenzhen, Guangdong,

China

Applicant's name...... Shenzhen Runlite Technology Co., Ltd.

BaoAn District, Shenzhen, China

Manufacture's name...... Shenzhen Runlite Technology Co., Ltd.

Address.....: Building A15, Tantou the 4th Industrial Estate, SongGang Town,

BaoAn District, Shenzhen, China

Test specification:

Standard.....: IEC TR 62778:2014 (Second Edition)

Test procedure.....: Test report

Non-standard test method.....: N/A

Test Report Form No.....: IEC62778A

TTRF Originator.....: CTI

Master TTRF.....: Dated 2016-02

Test item description...... SMD LED

Model/Type reference.....: 2835

Ratings....:: 60mA, 3,0V DC, 0,2W

Check No.: 2457501532









Lab Supervisor











Report No.: EED31K000844 Page 2 of 6


Summary of testing:

Test conditions:

1. Ambient temperature: 24,6°C; Humidity: 59%;

2. Measurement distance: 200mm;

3. Aperture stop: 7mm Spectral Distribution

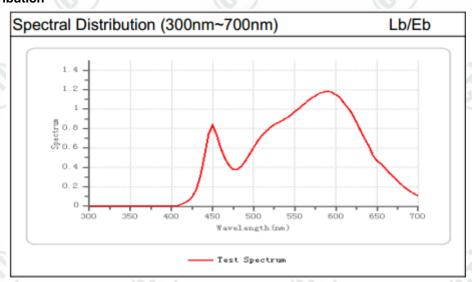

Conclusion: Sample tested is considered as Exempt Group.

Tests performed (name of test and test clause):

All applicable tests as described in Test Case and Measurement Sections were performed.

Testing location:


Centre Testing International Group Co., Ltd. Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China

Summary of compliance with National Differences:

N/A

Copy of marking plate:

N/A

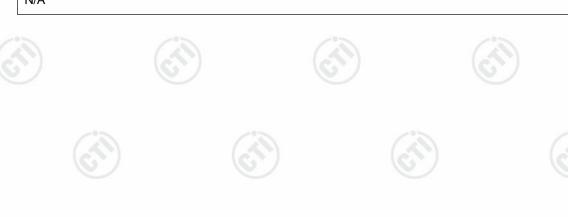















Report No.: EED31K000844 Page 3 of 6

		7 2 3 3
Test item particulars	······::	
Product evaluated		
	Luminaire	
Rated voltage (V)	(C) -	
Rated current (mA)		
Rated CCT (K)	N/A	
Rated Luminance (Mcd/m²)	N/A	
Component report data used		
	□ LED package	
	☐ LED module	
	☐ Lamp	
Possible test case verdicts:		
- test case does not apply to the test ob	ject N/A	
- test object does meet the requirement.	P (Pass)	
- test object does not meet the requirem	ent F (Fail)	
Testing		
Date of receipt of test item	Mar. 29, 2018	
Date (s) of performance of tests	: Mar. 30, 2018	
General remarks:	(0,)	(C) (C
"(See Enclosure #)" refers to additional "(See appended table)" refers to a table The tested sample(s) and the sample in Throughout this report a ⊠ comma / □	appended to the report. formation are provided by the client	
Manufacturer's Declaration per sub-	clause 4.2.5 of IECEE 02:	
The application for obtaining a CB Test includes more than one factory location declaration from the Manufacturer statin sample(s) submitted for evaluation is (a representative of the products from each been provided	and a ig that the re) h factory has	(cfl)
When differences exist; they shall be		information section
Name and address of factory (ies)	<u>-</u>	
General product information:		
The test current is 60mA.		















	IEC	TR 62778	
Clause	Requirement + Test	Result - Remark	Verdict

7	MEASUREMENT INFORMATION FLOW		P	
7.1	Basic flow			
10	'Law of conservation of luminance' applied		N/A	
	Use of only true luminance/radiance values	(6)	N/A	
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A	
	In case E _{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A	
7.2	Conditions for the radiance measurement			
	Standard condition applied (200mm distance, 0,011rad field of view)		Р	
\mathcal{I}	Non-standard condition applied	0.	N/A	
7.3	Special cases (I): Replacement by a lamp or LED module of another type			
	Light source is a white light source		N/A	
	Evaluation done based on highest luminance		N/A	
	Evaluation done based on CCT value		N/A	
7.4	Special cases (II): Arrays and clusters of primary light sources			
	LED package is evaluated as:	 □ RG0 unlimited □ RG1 unlimited	Р	
\mathcal{I}	E _{thr} of LED package applies to array	6,	N/A	
8	RISK GROUP CLASSIFICATION			
	Risk group achieved:		N/A	
	Risk Group 0 unlimited		Р	
	Risk Group 1 unlimited		N/A	
	- E _{thr} (lx) : Distance to reach RG1 (m) :		N/A	







Report No.: EED31K000844 Page 5 of 6

		IE	EC TR 627	78			
Clause	Requirement + Test			Resul	t - Remark		Verdict
1							
	TABLE: Spectrorac	liometric mea	surement				Р
	Measurement perfo	rmed on:		☑ LED pack☐ LED mod☐ Lamp☐ Luminaire	ule		
	Model number	•••••		2835			
- /	Test voltage (V)		•••••	3		(30)	_
(Test current (mA)			60		(0)	_
	Test frequency (Hz)	Test frequency (Hz)		N/A			_
	Ambient, t (°C)	•••••		24,6			_
	Measurement dista			⊠ 20 cm □ cm	(4)		_
	Source size			Non-smal □ Small : 1			_
	Field of view		•••••••••••••••••••••••••••••••••••••••	✓ 100 mrad☐ 11 mrad☐ 1,7 mrad	(for small sour	ces)	_
	Item	Symbol	Ur	nits	Re	esult	
Correlated	d colour temperature	ССТ	/°	<		/	
c/y colour	coordinates	x/y	(3)	/	x=0,3871	, y=0,4053	(c)
	hazard radiance	L _B		n ² •sr ¹)		5E+00	
uminance	е	L	cd	/m²	7,21	5E+05	









Report No.: EED31K000844 Page 6 of 6

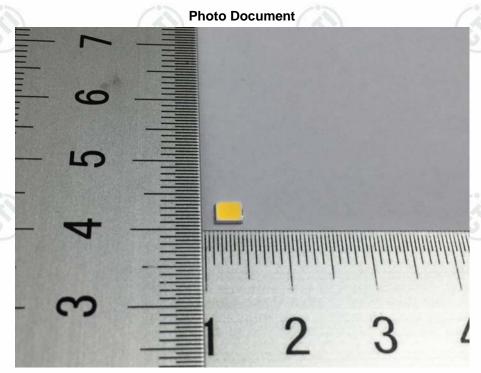


Fig. 1 - Overall view of the sample

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

