

深圳市源磊科技有限公司

Shenzhen Runlite Technology Co., Ltd



目录

Contents

公司介绍

About Runlite

■ 公司简介	01
Company Profile	
■ 企业文化	02
Corporate Culture	
■ 发展历程	03
Development History	
■ 资质认证	04
Quality Certification	
■ 白光分选	05
White Light Sorting	

产 品

Products

■ Filament LED Series	06
■ Flexible Filament Series	08
■ 2835 Series	10
■ 4014 Series	13
■ PCT3030 Series	14
■ EMC3030 Series	15
■ 3528 Series	16
■ 2016 Series	17
■ Flash2016 Series	18
■ 5050 Series	19
■ IC RGB5050 Series	20
■ 5730 Series	21
■ R/G/B3535 Series	22
■ R/G/B2835 Series	23
■ RGB3528 Series	24
■ RGB5050 Series	25
■ COB1313 Series	26
■ COB1417 Series	27
■ COB1512 Series	28
■ COB1616 Series	29

■ COB1919 Series	30
■ COB2020 Series	31
■ COB2424 Series	32
■ COB2522 Series	33
■ COB2828 Series	34
■ COB4046 Series	35
■ Down Light Module Series	36
■ Power Supply Free T8/T5 Series	37
■ Ceiling Light Module Series	38
■ IR3535 Series	39
■ Lens 2835 Series	40
■ UV LED Series	41
■ UV3535 Series	42

公司简介

Company Profile

Let the light alive



深圳市源磊科技有限公司是国有上市公司福建福日电子股份有限公司(股票代码:600203)旗下控股子公司,成立于2006年3月,是一家集LED光源研发、设计、生产和销售为一体的高新技术企业。源磊作为国内领先的高端LED光源器件封装制造商和产品解决方案提供商,公司主要产品线包括Filament LEDs、SMD LEDs、Flash Light、COB LEDs、Lamps、LED Lighting Modules、UV LEDs, Opto-couplers and Infrared Components等产品;产品广泛应用于通用照明、商业照明、景观照明、手机、平板、电玩产品、家电、安防、网通、机器人、摇控器、POS机、电脑周边等领域。

源磊作为中国一流的光电半导体制造专家,建筑面积有30000m²,员工1200名,生产面积22000m²;采用最先进的全自动生产线;月生产能力超过3000KK;公司通过ISO9001:2008、ISO14001:2004、TS16949:2009、ROHS等体系认证。

Shenzhen Runlite Technology Co., Ltd is the holding company of state-owned listed company, Fujian FURI Electronics Co., Ltd. (Stock Code:600203). Established in Mar. 2006, Runlite become a leading LED encapsulation manufacturer and solution supplier, we specialized in LED lighting source research, design and production of Filament LEDs, SMD LEDs, Flash Light, COB LEDs, Lamps, LED Lighting Modules, Flash LEDs, UV LEDs, Opto-couplers, Infrared Components, etc. Our products have been widely applied in general lighting, commercial lighting, landscape lighting, mobile phone, Ipad, electric toys, home appliance, security monitoring devices, internet network communications, robot, POS machine, computer and other fields.

As a leading manufacturer in white lighting field, Runlite has more than 30000m² of building area which including 22000m² of production area and 1200 staffs. Introduced with most advanced fully automated production line, monthly capacity is more than 3000KK. Company successfully complied with ISO9001: 2008, ISO14001: 2004, TS16949: 2009 and ROHS system certification.



企业文化

Corporate Culture

使命 Mission

为顾客创造价值

Create value for the clients

实现员工安居乐业

Realize a prosperous life for the employees

保障股东长远回报

Ensure long-term return for the share holders

承担企业社会责任

Take corporate social responsibility

愿景 Vision

做国际一流的光电半导体封装企业

To be the first-tier optoelectronic semiconductors packaging company

核心价值 Value

团队

Team

责任

Responsibility

创新

Innovation

诚信

Integrity

经营理念 Philosophy

创造虽小但有价值的技术

Create a micro but valuable technology

将公司的发展作为个人幸福的源泉

Make the corporate growth become the source of happiness of individuals

追求所有协助者和区域社会的共同繁荣

Seek mutual prosperousness for all partners and local community

以充满感谢和信赖的企业集团为目标

Aim to be a reliable and trustful corporation

Let the light alive

发展历程

Development History




Let the light alive

资质认证

Quality certification

认证 Certification

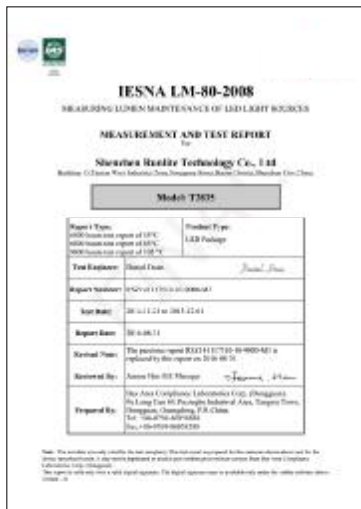

荣誉 Honors



Let the light alive

公司建立了完善的质量管理体系，通过ISO9001质量管理体系认证、ISO14001环境管理体系认证、TS16949质量管理体系认证、产品通过美国能源之星LM-80测试认证、加入Zhaga、CSA等行业标准联盟，确保提供的是高品质LED。



We are one of the guiding pioneer in technology development and in the manufacture of high-quality opto semiconductor products.

◇ ISO9001 ◇ LM-80 ◇ ISO14001 ◇ Zhaga member ◇ TS16949 ◇ CSA member

白光分选

White Light Sorting

源磊科技可以提供各种色温版本的白光产品：以美标（ANSI标准）和欧标（IEC标准）两大国际标准为主，并辅以特定色域的产品开发，满足通用照明的需求并实现特定照明领域的需求。目前有分区块分光模式及3步或5步MacAdam椭圆模式，可以满足对颜色一致性有着严苛要求的应用领域。

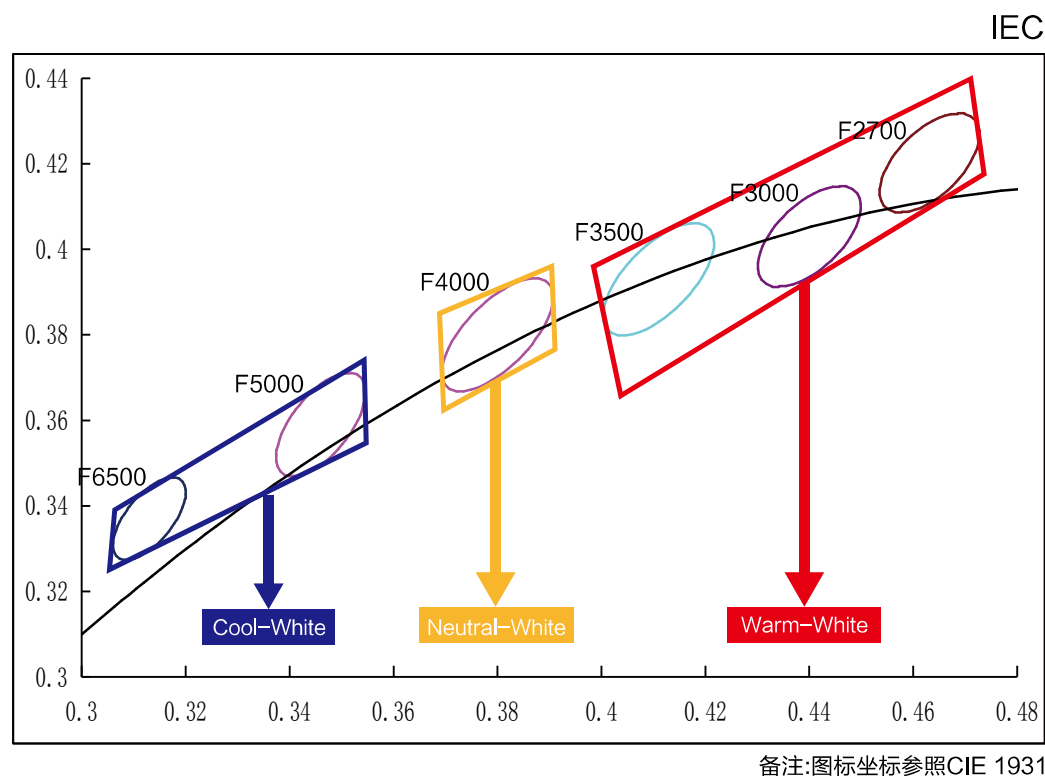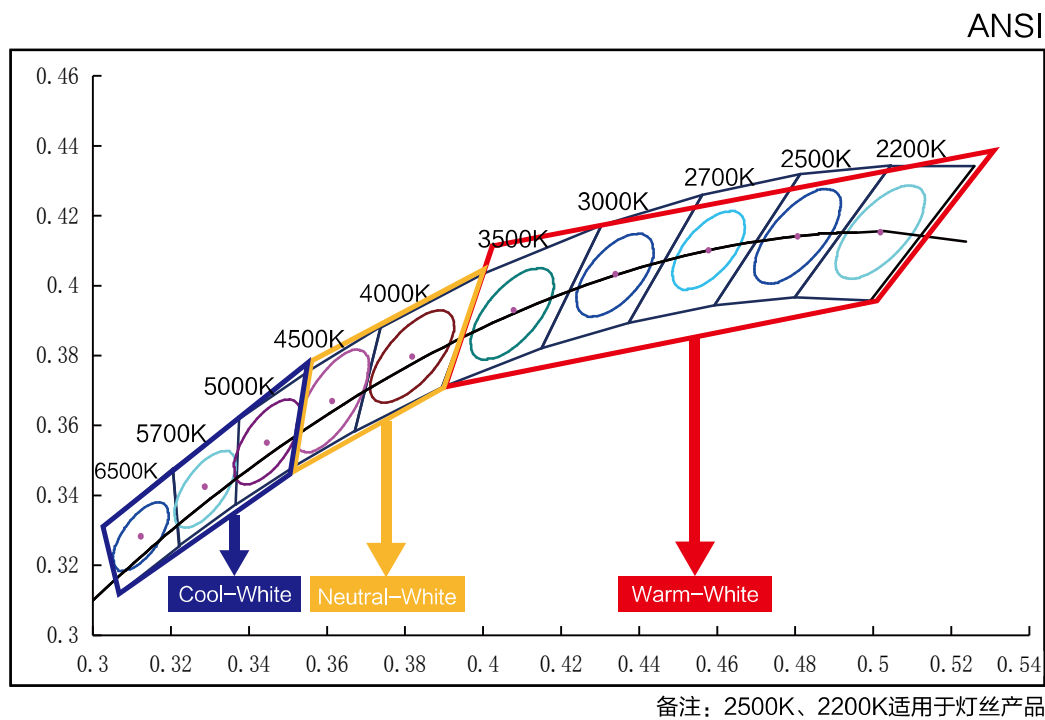

Let the light alive

Filament LED Series



A60




C35




ST64

Package Size


28(mm)



38(mm)




50(mm)



Filament LED Series

67(mm)



All dimensions are in millimeter)

Parameter

Size(mm)	Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
28	F2808A-241W22AH1J1FR0R5-DJ00	0.65	80-100	65-71	10	80	2200K
	F2808A-241W27SJ1J3FR0R5-DJ00	0.65	95-115	65-71	10	80	2700K
	F2808A-241W41SJ2J3FR0R5-DJ00	0.65	100-120	65-71	10	80	4000K
	F2808A-241W50SJ2J3FR0R5-DJ00	0.65	100-120	65-71	10	80	5000K
	F2808A-241W64SJ2J3FR0R5-DJ00	0.65	100-120	65-71	10	80	6500K
38	F3808A-241W22AK0K1FR0R5-DJ00	1	120-140	65-71	15	80	2200K
	F3808A-241W27SK2K3FR0R5-DJ00	1	140-160	65-71	15	80	2700K
	F3808A-241W41SK3K4FR0R5-DJ00	1	150-170	65-71	15	80	4000K
	F3808A-241W50SK3K4FR0R5-DJ00	1	150-170	65-71	15	80	5000K
	F3808A-241W64SK3K4FR0R5-DJ00	1	150-170	65-71	15	80	6500K
50	F5010A-251W22AK6L0FR1R6-D000	1.4	180-220	66-72	22	80	2200K
	F5010A-251W27SL1L2FR1R6-D000	1.4	220-260	66-72	22	80	2700K
	F5010A-251W41SL2L3FR1R6-D000	1.4	240-280	66-72	22	80	4000K
	F5010A-251W50SL2L3FR1R6-D000	1.4	240-280	66-72	22	80	5000K
	F5010A-251W64SL2L3FR1R6-D000	1.4	240-280	66-72	22	80	6500K
67	F6710A-451W22AK5K6FW9X4-DJ00	1.25	170-190	124-130	10	80	2200K
	F6710A-451W27SL0L0FW9X4-DJ00	1.25	200-220	124-130	10	80	2700K
	F6710A-451W41SL0L1FW9X4-DJ00	1.25	200-240	124-130	10	80	4000K
	F6710A-451W50SL0L1FW9X4-DJ00	1.25	200-240	124-130	10	80	5000K
	F6710A-451W64SL0L1FW9X4-DJ00	1.25	200-240	124-130	10	80	6500K

Flexible Filament Series



148mm



178mm



G80




A60




T45

Package Size

148(mm)

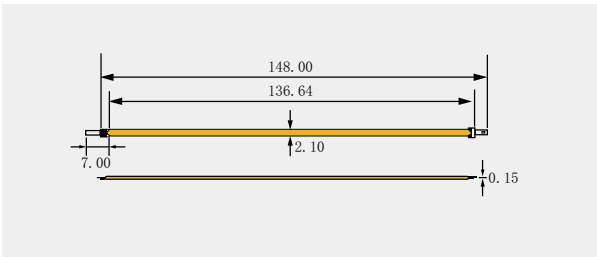

178(mm)

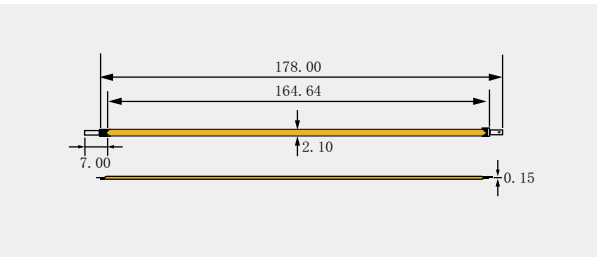

All dimensions are in millimeter

Parameter

Size(mm)	Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
148	F1485F-532W22FL2L3FY0Y9-D000	2.8	240-270	135-145	20	80	2200K
	F1485F-532W22FK7L1HY0Y9-D000	2.8	190-210	135-145	20	90	2200K
	F1485F-532W27SL2L3FY0Y9-D000	2.8	250-280	135-145	20	80	2700K
	F1485F-532W22FL0L2HY0Y9-D000	2.8	200-230	135-145	20	90	2700K
178	F1785F-532W22FL2L3FY0Y9-D000	2.8	240-270	135-145	20	80	2200K
	F1785F-532W22FK7L1HY0Y9-D000	2.8	190-210	135-145	20	90	2200K
	F1785F-532W27SL2L3FY0Y9-D000	2.8	250-280	135-145	20	80	2700K
	F1785F-532W22FL0L2HY0Y9-D000	2.8	200-230	135-145	20	90	2700K

Flexible Filament Series



248mm



308mm/450mm/600mm
(More Filament LED Developing)



G80




A60




T45

Package Size

248(mm)

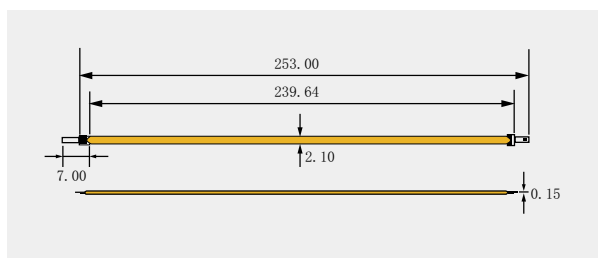

308(mm)

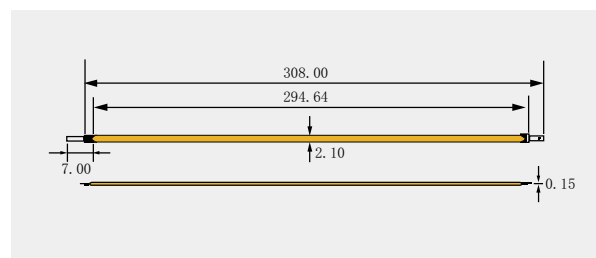


All dimensions are in millimeter

Parameter

Size(mm)	Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
248	F2485F-972W22FN1N2F3030-D000	5.2	500-550	250-260	20	80	2200K
	F2485F-972W22FN0N1H3030-D000	5.2	400-450	250-260	20	90	2200K
308	F3085F-524W22FN0N1HX5Y4-D000	5.5	400-450	130-140	40	90	2200K
	F3085F-524W22FN1N2FX5Y4-D000	5.5	500-550	130-140	40	90	2200K

2835 Series

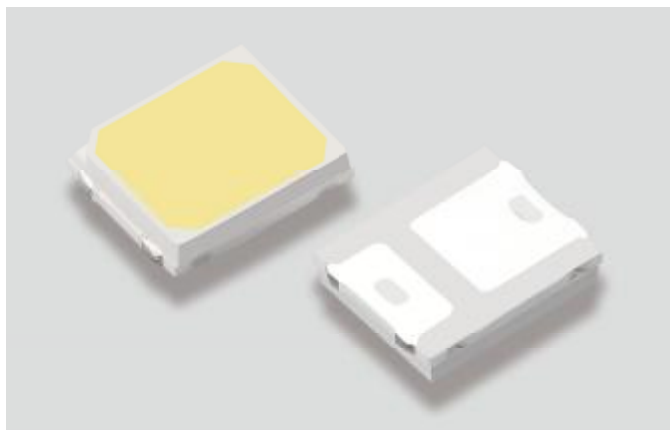

球泡灯
Bulb



灯管
Tube




筒灯
Downlight



吸顶灯
Ceiling Light

Package Size

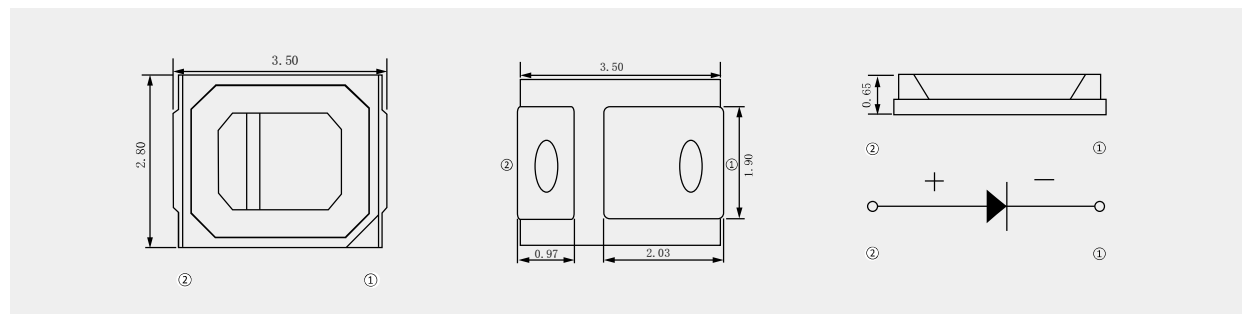

All dimensions are in millimeter

Parameter

2835 0.2W 3V 60mA

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
T28351-W27SC2D0FB3B4-MK00	0.2	24-28	3.0-3.3	60	80	2700K
T28351-W29SC2D0FB3B5-MK00			3.0-3.3	60	80	3000K
T28351-W34SC2D0FB5B7-MK00			3.0-3.3	60	80	3500K
T28351-W41SC2D0FB4B7-MK00			3.0-3.3	60	80	4000K
T28351-W50SC2D0FB5B7-MK00			3.0-3.3	60	80	5000K
T28351-W62GC2D0FB5B7-MK01			3.0-3.3	60	80	6000K
T28351-W64SC2D0FB5B7-MK01			3.0-3.3	60	80	6500K

2835 Series

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
T28351-W29SD0D1FB3B5-MK01	0.2	26-30	3.0-3.3	60	80	3000K
T28351-W34SD0D1FB3B5-MK00			3.0-3.3	60	80	3500K
T28351-W41SD0D1FB5B7-MK01			3.0-3.3	60	80	4000K
T28351-W50SD0D1FB5B7-MK00			3.0-3.3	60	80	5000K
T28351-W62GD0D1FB5B7-MK00			3.0-3.3	60	80	6000K
T28351-W64SD0D1FB5B7-MK00			3.0-3.3	60	80	6500K
T28351-W27SD1D2FB2B3-MK01	0.2	28-32	2.8-3.1	60	80	2700K
T28351-W29SD1D2FB2B3-MK01			2.8-3.1	60	80	3000K
T28351-W34SD1D2FB2B3-MK02			2.8-3.1	60	80	3500K
T28351-W41SD1D2FB3B5-MK01			2.8-3.1	60	80	4000K
T28351-W50SD1D2FB3B5-MK01			2.8-3.1	60	80	5000K
T28351-W62GD1D2FB3B5-MK00			2.8-3.1	60	80	6000K
T28351-W64SD1D2FB3B5-MK01			2.8-3.1	60	80	6500K


2835 0.2W 3V 60mA High Efficacy

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)	Efficacy (Lm/W)
T28351-W29SD1D2FB2B4-AF02	0.2	28-32	2.7-3.0	60	80	3000K	170-180
T28351-W41SD2E0FB2B4-AF02	0.2	30-34	2.7-3.0	60	80	4000K	175-185
T28351-W50SD2E0FB2B4-AF01	0.2	30-34	2.7-3.0	60	80	5000K	175-185
T28351-W62GD2E0FB2B4-AF02	0.2	30-34	2.7-3.0	60	80	6000K	175-185
T28351-W64SD2E0FB2B4-AF00	0.2	30-34	2.7-3.0	60	80	6500K	175-185
T28351-W29SC6C7FB2B3-AF02	0.2	29-33	2.7-2.9	60	80	3000K	185-195
T28351-W41SC7C8FB2B3-AF00	0.2	31-35	2.7-2.9	60	80	4000K	190-200
T28351-W50SC7C8FB2B3-AF00	0.2	31-35	2.7-2.9	60	80	5000K	190-200
T28351-W62GC7C8FB2B3-AF00	0.2	31-35	2.7-2.9	60	80	6000K	190-200
T28351-W64SC7C8FB2B3-AF02	0.2	31-35	2.7-2.9	60	80	6500K	190-200
T28351-W29SC6C7FB2B3-AF06	0.2	29-33	2.7-2.9	60	80	3000K	185-195
T28351-W41SC7C8FB2B3-AF07	0.2	31-35	2.7-2.9	60	80	4000K	190-200
T28351-W50SC7C8FB2B3-AF07	0.2	31-35	2.7-2.9	60	80	5000K	190-200
T28351-W62GC7C8FB2B3-AF07	0.2	31-35	2.7-2.9	60	80	6000K	190-200
T28351-W64SC7C8FB2B3-AF06	0.2	31-35	2.7-2.9	60	80	6500K	190-200
T28351-W29SC6C7FB2B3-AF08	0.2	29-33	2.7-2.9	60	80	3000K	190-200
T28351-W41SE0E1FB2B3-AF01	0.2	32-36	2.7-2.9	60	80	4000K	195-205
T28351-W50SE0E1FB2B3-AF02	0.2	32-36	2.7-2.9	60	80	5000K	195-205
T28351-W58GE0E1FB2B3-AF00	0.2	32-36	2.7-2.9	60	80	5700K	195-205
T28351-W62GE0E1FB2B3-AF00	0.2	32-36	2.7-2.9	60	80	6000K	195-205
T28351-W64SE0E1FB2B3-AF00	0.2	32-36	2.7-2.9	60	80	6500K	195-205

2835 Series



Package Size

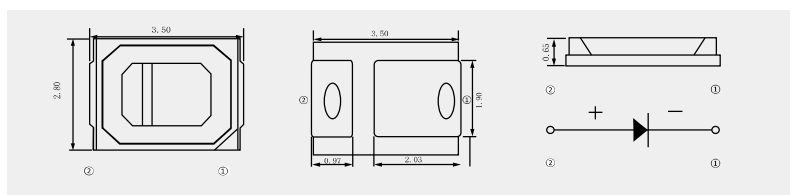

All dimensions are in millimeter

2835 1W 9V 100mA

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
P28351-W29SJ3K0FE8F 1-0005	1	120-130	8.8-9.6	100	80	3000K
P28351-W41SK0K1FE8F 1-AB01		130-140	8.8-9.6	100	80	4000K
P28351-W64SK1K2FE8F 1-0000		140-150	8.8-9.6	100	80	6500K

2835 1W 18V 60mA

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
P28351-W27SJ3K0F J2J5-0000	1	110-130	18-21	60	80	2700K
P28351-W29SK0K1F J2J5-0000		120-130	18-21	60	80	3000K
P28351-W41SK0K1F J2J5-0000		120-130	18-21	60	80	4000K
P28351-W41SK1K2F J2J7-0000		130-140	18-21	60	80	4000K
P28351-W62GK0K1F J2J5-0000		120-140	18-21	60	80	6000K
P28351-W62GK0K1F J2J7-0000		120-140	18-21	60	80	6000K
P28351-W64SK0K2F J2J7-0000		120-150	18-21	60	80	6500K
P28351-W64SK1K2F J2J7-0001		140-150	18-21	60	80	6500K


2835 0.5W 18V 30mA

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
T28351-W27SF3G0FJ2J 7-AF00	0.5	60-70	18-21	30	80	2700K
T28351-W29SG0G1FJ2J 5-AF00		65-70	18-21	30	80	3000K
T28351-W41SG1H0F J1J4-AF00		70-75	18-21	30	80	4000K
T28351-W50SG1H0F J2J7-AF00		70-80	18-21	30	80	5000K
T28351-W62GG1H0F J2J7-AF00		70-80	18-21	30	80	6000K
T28351-W64SG1H0FJ1J 4-AF00		85-95	18-21	30	80	6500K

2835 1W 12V 75mA

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
P28351-W29SJ3K0FG4G8-0000	1	120-130	11-13	75	80	3000K
P28351-W41SG0G1FG4G8-0000		130-140	11-13	75	80	4000K
P28351-W64SK0K1FG4G8-0000		140-150	11-13	75	80	6500K

4014 Series

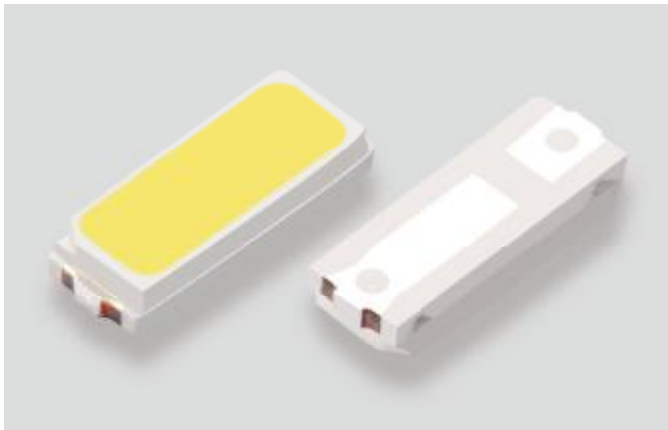


面板灯
Panel Light



灯管
Tube

Package Size

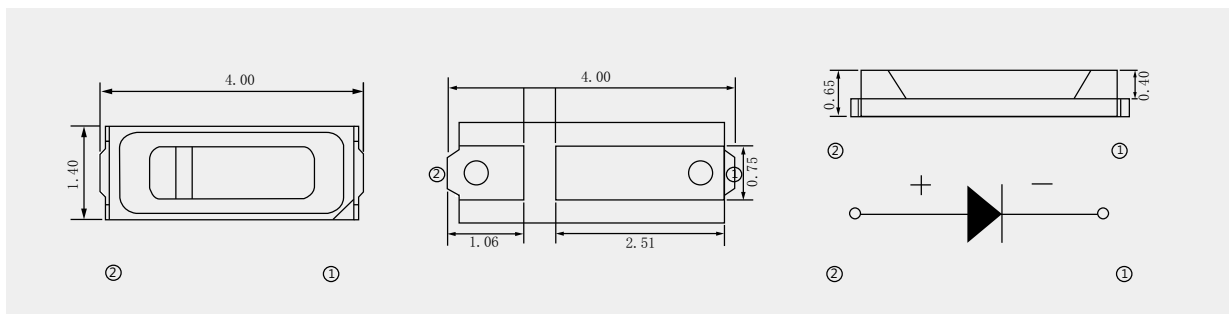


All dimensions are in millimeter)

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)	Efficacy (Lm/W)
T40141-W29SC2D0FB3B5-MJ02	0.2	32-34	2.7-2.9	60	80	3000K	200-210
T40141-W41SD0D1FB3B6-AB01	0.2	33-35	2.7-2.9	60	80	4000K	205-215
T40141-W64SD0D1FB3B5-MJ02	0.2	35-37	2.7-2.9	60	80	6500K	220-230
T40141-W29SD0D1FB3B5-MJ02	0.2	32-34	2.7-2.9	60	80	3000K	200-210
T40141-W41SD1D2FB3B5-MJ03	0.2	33-35	2.7-2.9	60	80	4000K	205-215
T40141-W64SD1D2FB3B5-MJ02	0.2	35-37	2.7-2.9	60	80	6500K	210-230



PCT3030 Series

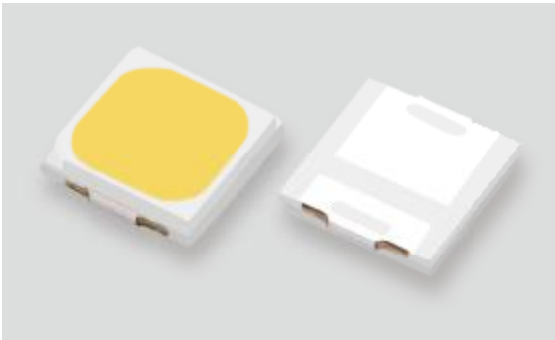


球泡灯
Bulb



洗墙灯
Led Wall Washer



Package Size

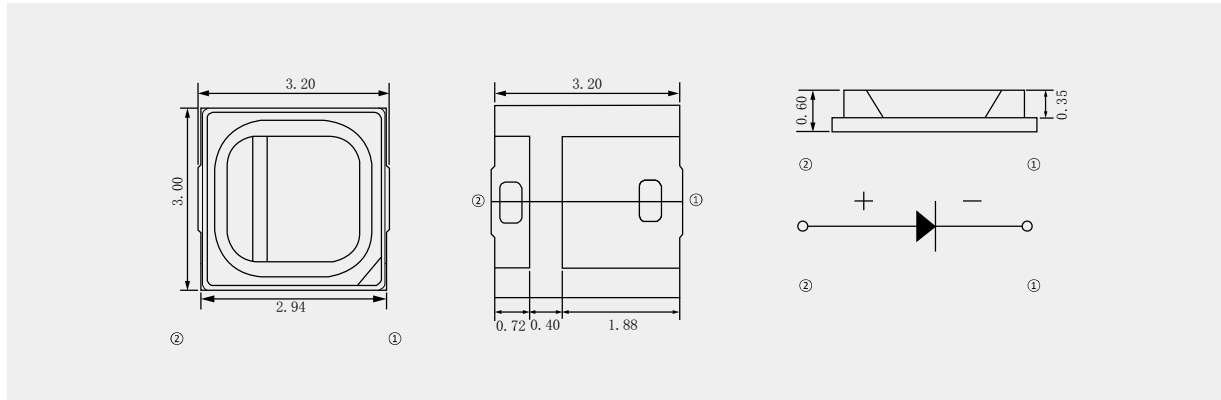


All dimensions are in millimeter)

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
P30301-W27SJ2J3FE8F2-0000	1	100-120	8.8-9.8	100	80	2700K
P30301-W29SJ3K0FE8F2-0000	1	110-130	8.8-9.8	100	80	3000K
P30301-W34SK0K1FE8F2-0000	1	120-140	8.8-9.8	100	80	3500K
P30301-W41SJ2J3FE8F2-0000	1	100-120	8.8-9.8	100	80	4000K
P30301-W50SJ3K0FE8F2-0000	1	110-130	8.8-9.8	100	80	5000K
P30301-W64SK0K1FE8F2-0000	1	120-140	8.8-9.8	100	80	6500K

EMC3030 Series

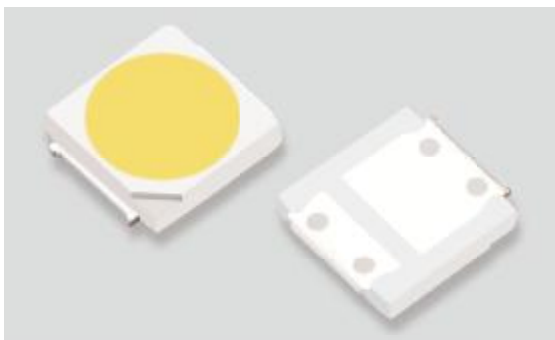

球泡灯
Bulb




洗墙灯
Led Wall Washer



High bay



Package Size

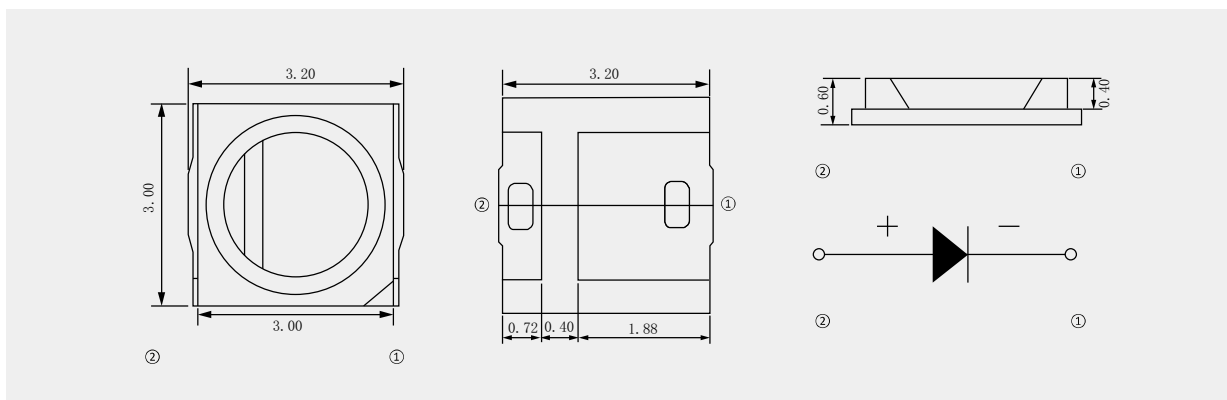

All dimensions are in millimeter)

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
E30301-W27SJ2J3FE8F2-0000	1	100-120	8.8-9.8	100	80	2700K
E30301-W29SJ3K0FE8F2-0000	1	110-130	8.8-9.8	100	80	3000K
E30301-W34SK0K1FE8F2-0000	1	120-140	8.8-9.8	100	80	3500K
E30301-W41SJ2J3FE8F2-0000	1	100-120	8.8-9.8	100	80	4000K
E30301-W50SJ3K0FE8F2-0000	1	110-130	8.8-9.8	100	80	5000K
E30301-W64SK0K1FE8F2-0000	1	120-140	8.8-9.8	100	80	6500K

3528 Series




灯带
Strip



白光灯带
White Strip Light

Package Size

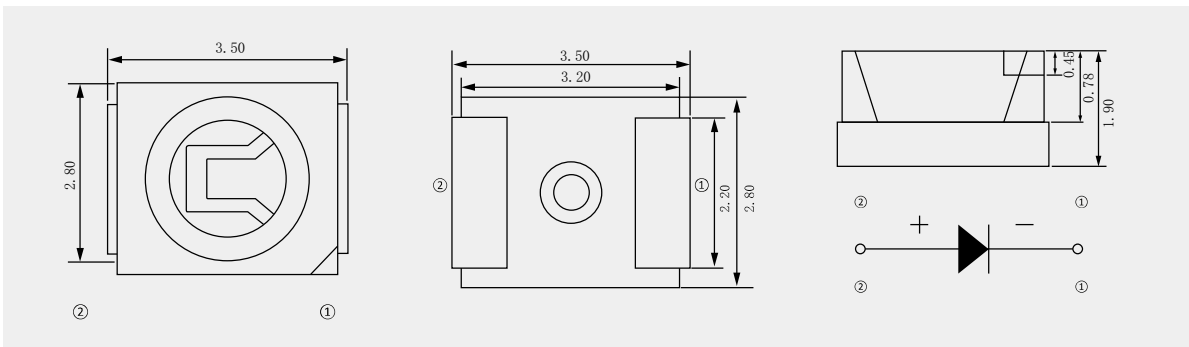


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
T35281-W27SA2A3FB2B7-AI00	0.06	6-8	2.7-3.3	20	80	2700K
T35281-W29SA3A4FB2B7-AI00	0.06	7-9	2.7-3.3	20	80	3000K
T35281-W34SA3A4FB2B7-AI00	0.06	7-9	2.7-3.3	20	80	3500K
T35281-W41SA2A3FB2B7-AI00	0.06	6-8	2.7-3.3	20	80	4000K
T35281-W50SA3A4FB2B7-AI00	0.06	7-9	2.7-3.3	20	80	5000K
T35281-W64SA4A5FB2B7-AI00	0.06	8-10	2.7-3.3	20	80	6500K
T35281-W70GA4A4EB2B6-0000	0.06	7-9	2.8-3.1	20	80	7000K
T35281-W86GA3A4DB3B8-AI00	0.06	7-9	2.8-3.1	20	80	8000K
T35281-WWGX0A3A5FB2B5-AI00	0.06	7-9	2.8-3.1	20	80	10000K
T35281-WWGX3A4DB3C0-AI00	0.06	7-9	2.8-3.1	20	70	12000K
T35281-WWA0A2A3EB3C0-AI01	0.06	6-8	2.8-3.1	20	75	20000K

2016 Series

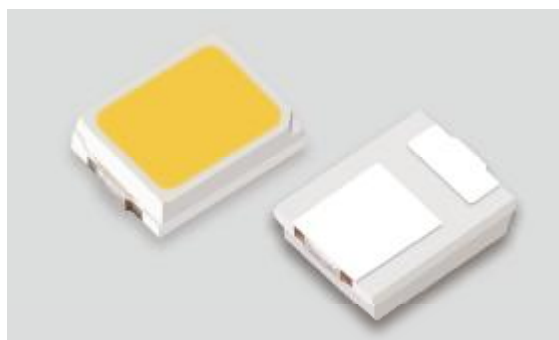


面板灯
Panel Light




灯管
Tube



灯条
Light Bar

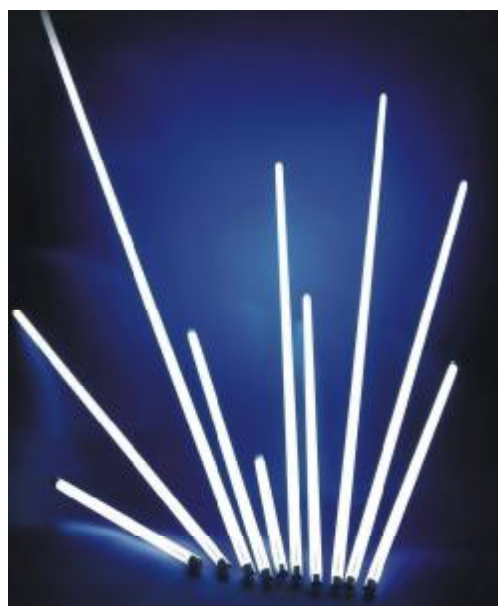

Package Size

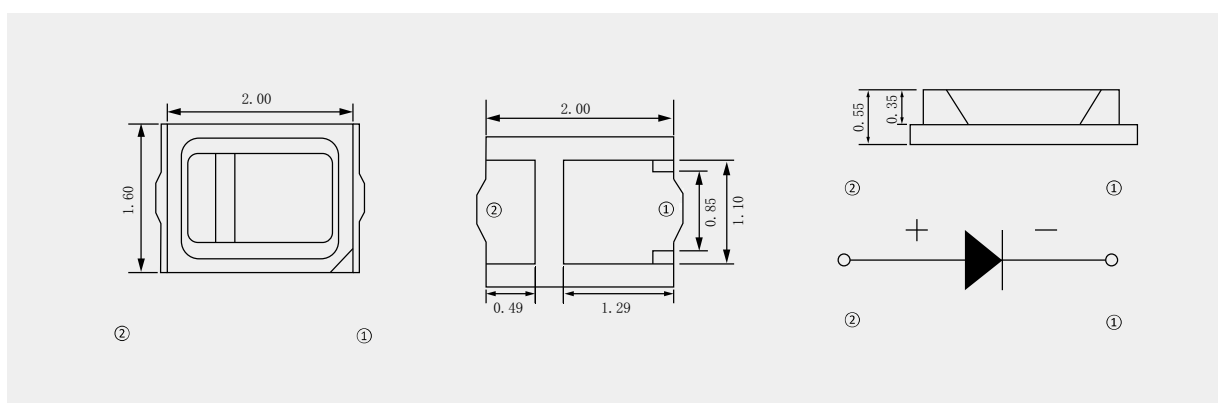


All dimensions are in millimeter

Parameter

Part Number	Watt(w)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
T20161-W27SB7C0FB2B7-AI00	0.2	18-22	2.7-3.3	60	80	2700K
T20161-W29SC0C1FB2B7-AI00	0.2	20-24	2.7-3.3	60	80	3000K
T20161-W34SC1C2FB2B7-AI00	0.2	22-26	2.7-3.3	60	80	3500K
T20161-W41SC0C1FB2B7-AI00	0.2	20-24	2.7-3.3	60	80	4000K
T20161-W50SC1C2FB2B7-AI00	0.2	22-26	2.7-3.3	60	80	5000K
T20161-W64SC2D0FB2B7-AI00	0.2	24-28	2.7-3.3	60	80	6500K

Flash 2016 Series



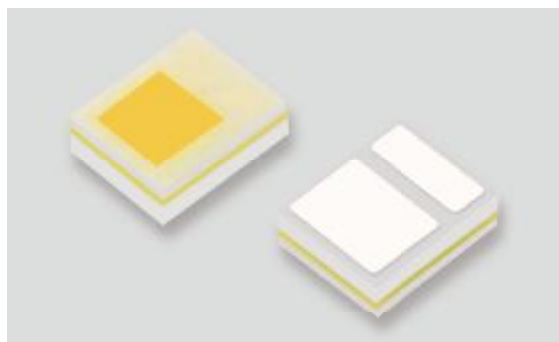


手机
Mobile Phone



相机
Camera

Package Size




All dimensions are in millimeter)

Parameter

Part Number	If(mA)	Luminous Flux(lm)	Ifp(mA)	Luminous Flux(lm)	Vf(V)	Ra	CCT(K)
P20161-W57KE1F1FD1D3-0000	150	45-70	350	90-140	3-3.8V	80	5000-6000K
A2016C-W57WG5H3AD1D3-0001	350	90-140	500	140-180	3-3.8V	70	5000-6000K
A2016C-W22WG4H2AD1D3-0001	350	140-180	500	200-280	3-3.8V	70	1950-2450K
A2016C-W57WK1K2AD1D3-0001	500	150-190	1000	250-310	3-3.8V	70	5000-6000K
A2016C-W22WK0K1AD1D3-0001	500	150-190	1000	280-340	3-3.8V	70	1950-2450K
A2016C-W57WJ2K1AD1D3-0001	500	80-130	500	130-170	3-3.8V	70	5000-6000K
A2016C-W57WK2K3AD1D3-0001	500	140-160	1000	220-280	3-3.8V	70	5000-6000K


5050 Series

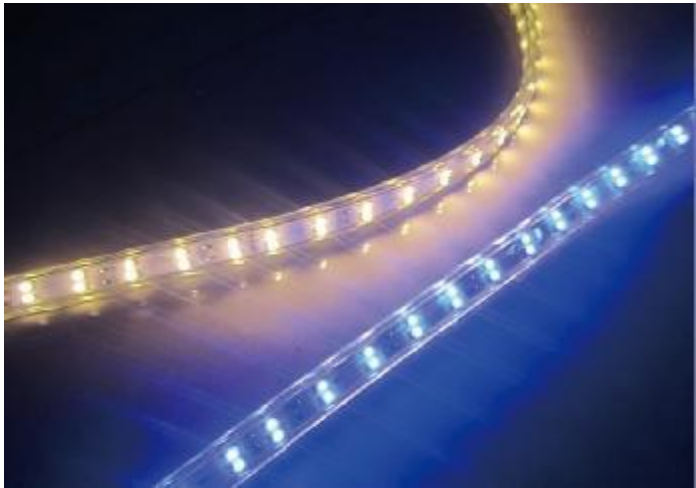

灯带
Strip Light

白光灯带
White Strip Light

Package Size


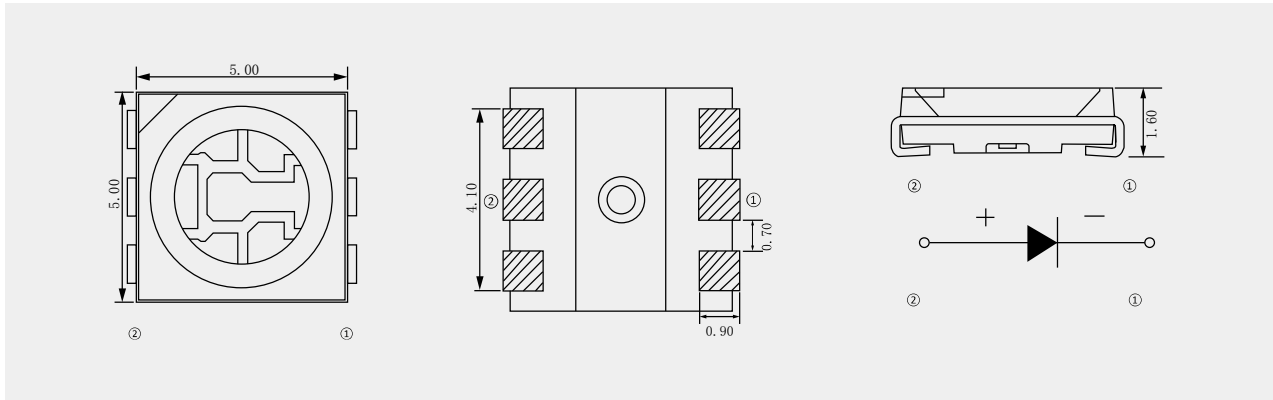


All dimensions are in millimeter


Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
T50501-W27SC0C1B2B7-AI00	0.2	20-24	2.7-3.3	60	80	2700K
T50501-W29SC1C2B2B7-AI00	0.2	22-26	2.7-3.3	60	80	3000K
T50501-W34SC2D0B2B7-AI00	0.2	24-28	2.7-3.3	60	80	3500K
T50501-W41SB7C0B2B7-AI00	0.2	20-24	2.7-3.3	60	80	4000K
T50501-W50SC1C2B2B7-AI00	0.2	22-26	2.7-3.3	60	80	5000K
T50501-W64SC2D0B2B7-AI00	0.2	24-28	2.7-3.3	60	80	6500K

IC RGB5050 Series(Developing)

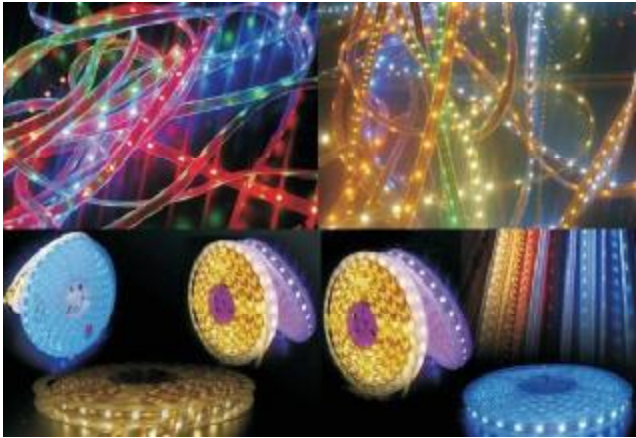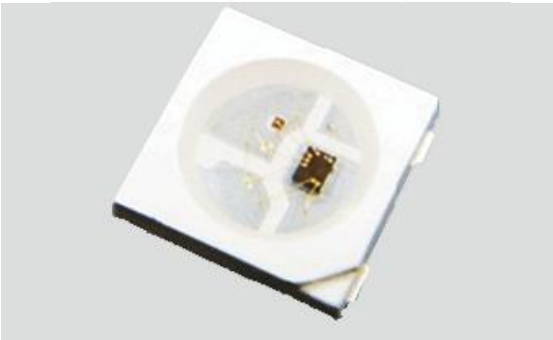


灯带
Strip



灯条
Light Bar

Package Size

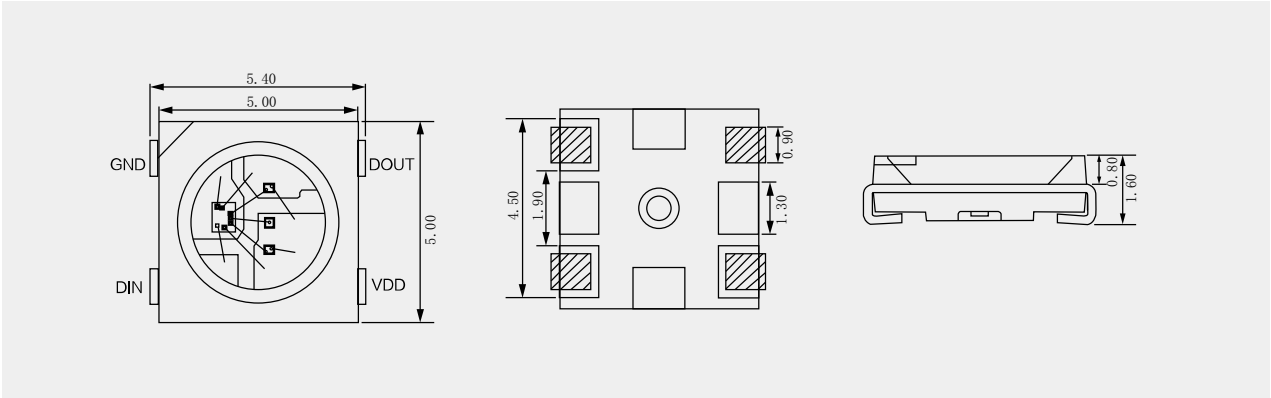


All dimensions are in millimeter

Parameter

Part Number	Color	If(mA)	Vf(V)		Iv(mcd)		Wd(nm)	
			Min	Max	Min	Max	Min	Max
T50501-CRGBGEGGAA2B8-XXXX	R	12	1.7	2.4	350	600	620	625
	G	12	2.7	3.4	1000	1350	520	525
	B	12	2.7	3.4	200	300	465	470

5730 Series

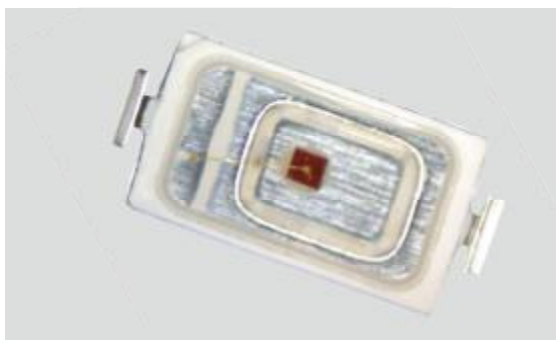




灯带
Strip



植物灯
Grow Light



Package Size




All dimensions are in millimeter

Parameter

Part Number	Color	Watt(W)	Iv(mcd)	Vf(V)	If(mA)	Wd(nm)
T5730F-R615JEKCA3B0-XXXX	Red	0.5	4400-8800	1.8-2.6	150	615-625
T5730F-A600JEKCA7B1-XXXX	Amber	0.5	4400-8800	2.0-2.8	150	600-610
T57301-G515KCLDAB3C0-XXXX	Green	0.5	8800-18000	2.8-3.6	150	515-525
T57301-B450HEJBAB3C0-XXXX	Blue	0.5	1400-2800	2.8-3.6	150	450-460

R/G/B3535 Series

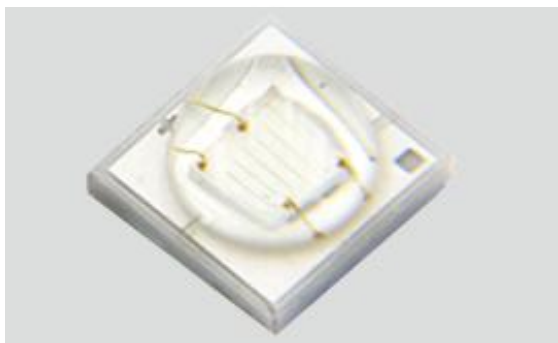

植物灯
Grow Light



洗墙灯
Wall Washer Lamp




灯条
Light Bar



R/G/B3535 Series

Package Size

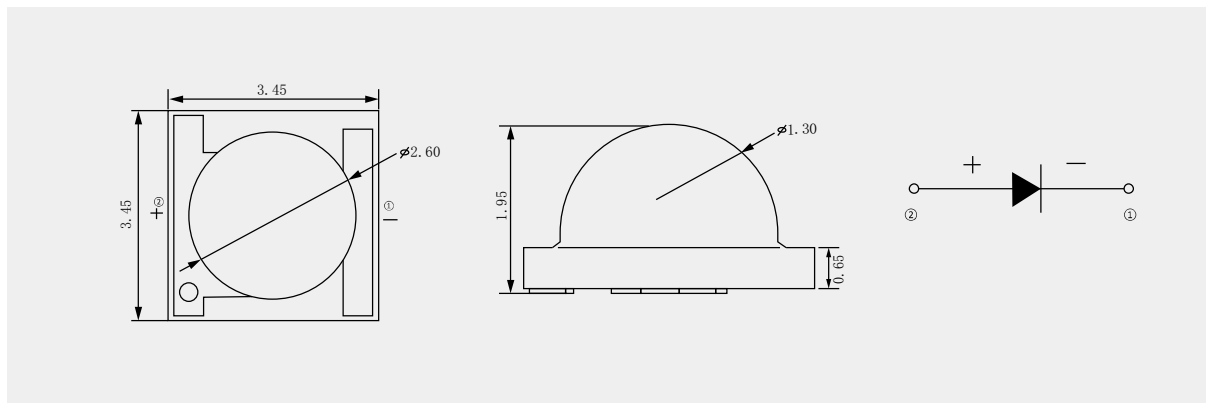


All dimensions are in millimeter

Parameter

Part Number	Color	Luminous Flux(lm)	Vf(V)	If(mA)	Wd(nm)	2 θ 1/2
A3535C-R615E3F2AA6B5-0001	R	55-75	1.8-2.6	350	615-630	120°
A3535C-G515G5H1AC0C7-0001	G	90-120	3.0-3.8	350	515-530	120°
A3535C-B455C0C4AC0C7-0001	B	16-26	3.0-3.8	350	455-470	120°

R/G/B 2835 Series



灯条
Light Bar



灯带
Strip Light






键盘
keyboard



植物灯
Grow Light

Package Size



All dimensions are in millimeter


Parameter

Part Number	Color	Watt(W)	Iv(mcd)	Vf(V)	If(mA)	Wd(nm)
T2835F-R615HHJCAA3B0-XXXX	Red	0.2	1750-3500	1.8-2.6	60	615-625
T2835F-R615JEKCAA3B0-XXXX	Red	0.5	4400-8800	1.8-2.6	150	615-625
T2835F-A600HHJCAA3B0-XXXX	Amber	0.2	1750-3500	1.8-2.6	60	600-610
T2835F-A600JDKAAA5B2-XXXX	Amber	0.5	3500-7000	2.0-2.8	150	600-610
T2835F-Y585HHJCAA3B0-XXXX	Yellow	0.2	1750-3500	1.8-2.6	60	585-595
T2835F-Y585JEKCAA3B0-XXXX	Yellow	0.5	4400-8800	1.8-2.6	150	585-595
T2835I-G515JDKAAB3C0-XXXX	Green	0.2	3500-7000	2.8-3.6	60	515-525
T2835I-G515KCLDAB3C0-XXXX	Green	0.5	8800-18000	2.8-3.6	150	515-525
T2835I-B450GGHAAB3C0-XXXX	Blue	0.2	550-1100	2.8-3.6	60	450-460
T2835I-B450HEJBAB3C0-XXXX	Blue	0.5	1400-2800	2.8-3.6	150	450-460
T2835I-B460GKHGAB3B8-XXXX	Blue	0.2	880-1750	2.8-3.6	60	460-470
T2835I-B460HHJCAB3C0-XXXX	Blue	0.5	1750-3500	1.8-2.6	150	460-470

RGB 3528 Series



灯带
Strip




灯条
Light Bar



键盘
keyboard

Package Size

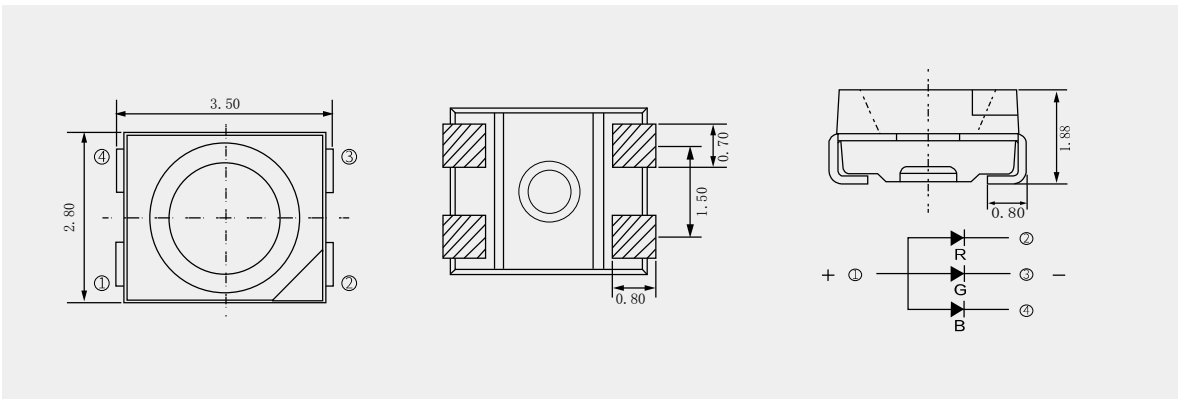

All dimensions are in millimeter


Parameter

Part Number	Color	Watt(W)	Iv(mcd)	Vf(V)	If(mA)	Wd(nm)
T3528F-QRGBGHGJAA3A8-BA00	Red	—	600~750	1.8~2.4	20	620~625
	Green	—	1500~1900	2.8~3.4	20	520~525
	Blue	—	400~520	2.8~3.4	20	468~473
T3528F-QRGBGCGDAA1B6-BA00	Red	—	130~200	1.6~2.4	5	620~630
	Green	—	300~500	2.4~3.2	5	520~530
	Blue	—	100~160	2.4~3.2	5	465~475

RGB 5050 Series



灯带
Strip




灯条
Light Bar



键盘
keyboard

Package Size

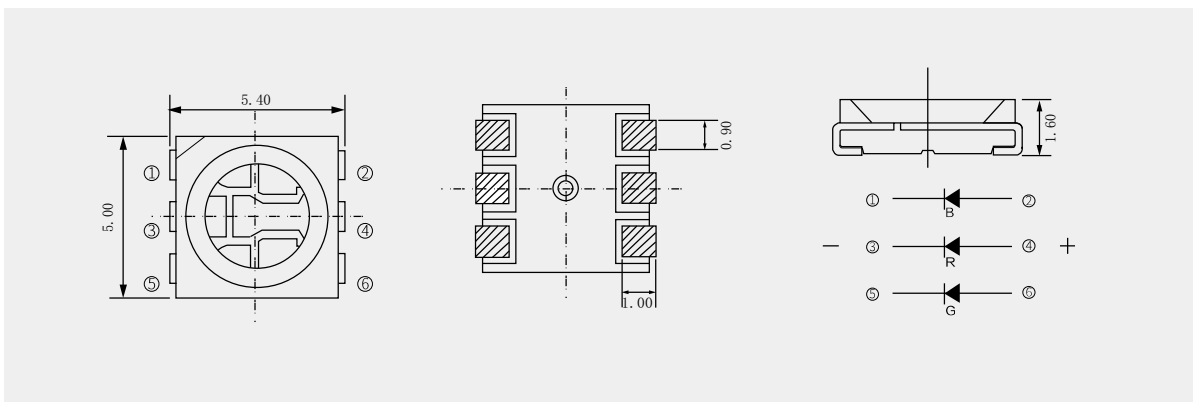

All dimensions are in millimeter

Parameter

Part Number	Color	Watt(W)	Iv(mcd)	Vf(V)	If(mA)	Wd(nm)
T50501-QRGBJGLAA3B8-XXXX (普亮)	Red	---	700-1000	1.8-2.6	20	620-625
	Green	---	1700-2200	2.8-3.6	20	518-523
	Blue	---	350-500	2.8-3.6	20	464-469
T5050F-QRGBJGLAA3B8-XXXX (高亮)	Red	---	700-1000	1.8-2.6	20	620-625
	Green	---	1700-2200	2.8-3.6	20	518-523
	Blue	---	350-500	2.8-3.6	20	464-469
T5050F-QRGBGCGDAA1B6-XXXX	Red	---	130-200	1.6-2.4	5	620-630
	Green	---	300-500	2.4-3.2	5	520-530
	Blue	---	100-160	2.4-3.2	5	465-475

COB 1313 Series




轨道灯
Track Light

射灯
Spot Light

筒灯
Downlight

Package Size

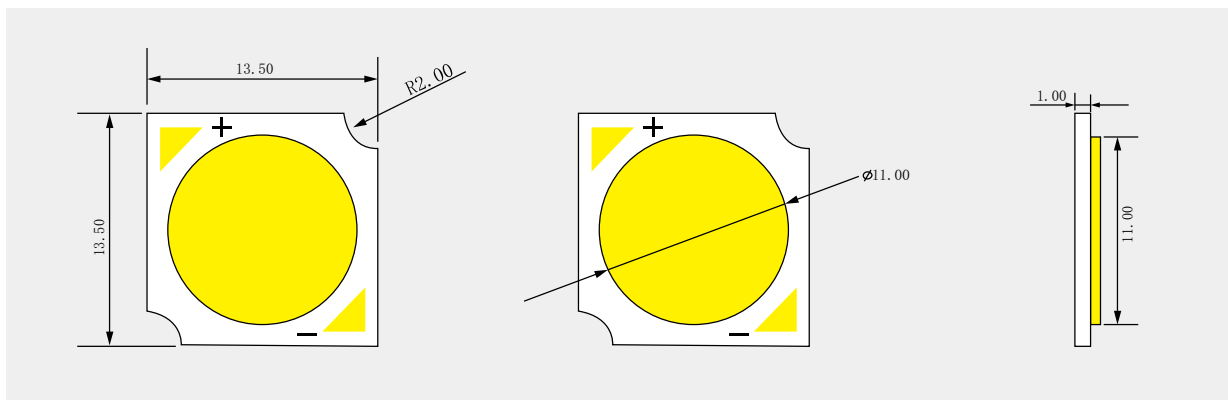


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP1313L07-0702W*****-0000	7	700-800	21-23	300	80/90/95+	2700K
CP1313L09-0902W*****-0000	9	900-1000	27-30	300		3000K
CP1313L12-1202W*****-0000	12	1200-1300	36-40	300		3400K
CP1313L15-1203W*****-0000	15	1500-1600	36-40	450		4000K
						5000K
						6500K

COB 1417 Series

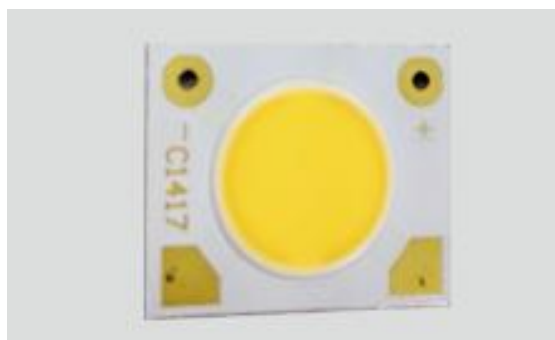

轨道灯
Track Light




射灯
Spot Light



筒灯
Downlight

Package Size

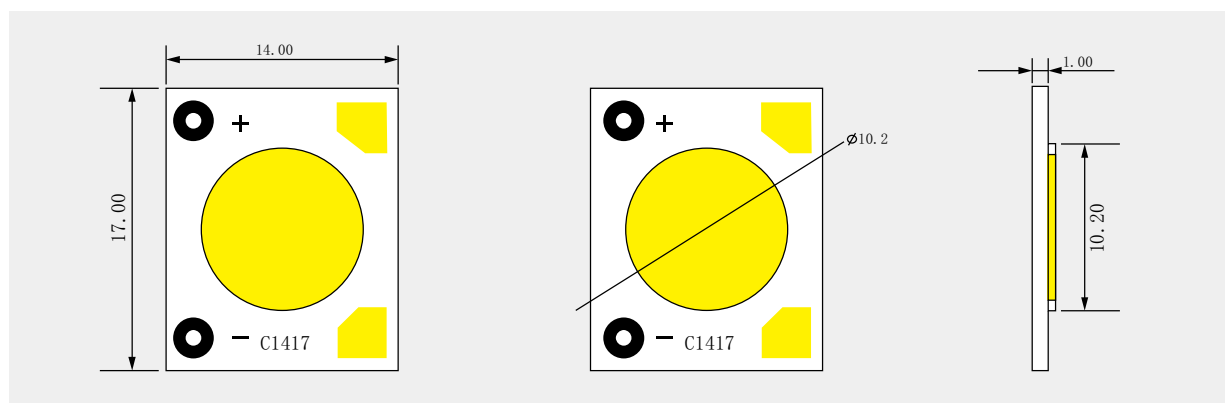


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP1417L07-0702W*****-0000	7	700-800	21-23	300	80/90/95+	2700K
CP1417L09-0902W*****-0000	9	900-1000	27-30	300		3000K
CP1417L12-1202W*****-0000	12	1200-1300	36-40	300		3400K
CP1417L15-1203W*****-0000	15	1500-1600	36-40	450		4000K
						5000K
						6500K

COB 1512 Series

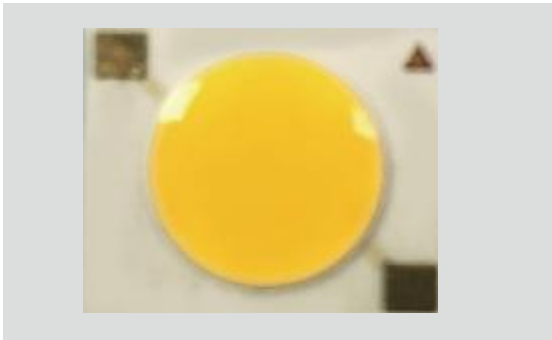

轨道灯
Track Light




射灯
Spot Light



筒灯
Downlight

Package Size

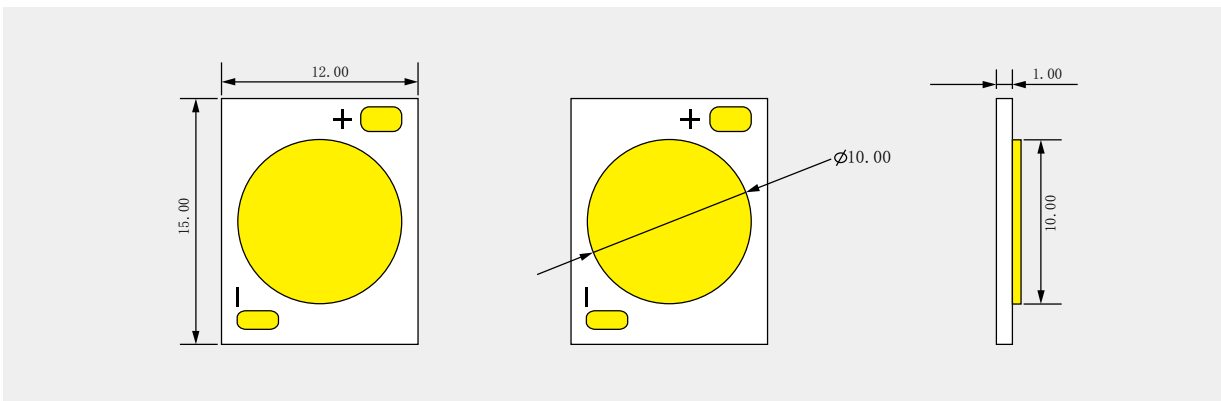


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP1512M07-0702W*****-0000	7	700-800	21-23	300	80/90/95+	2700K 3000K 3400K 4000K 5000K 6500K
CP1512M09-0902W*****-0000	9	900-1000	27-30	300		
CP1512M12-1202W*****-0000	12	1200-1300	36-40	300		
CP1512M15-1203W*****-0000	15	1500-1600	36-40	450		

COB 1616 Series

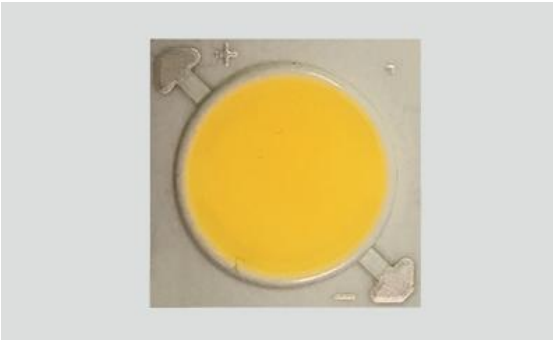

轨道灯
Track Light




射灯
Spot Light



筒灯
Downlight

Package Size

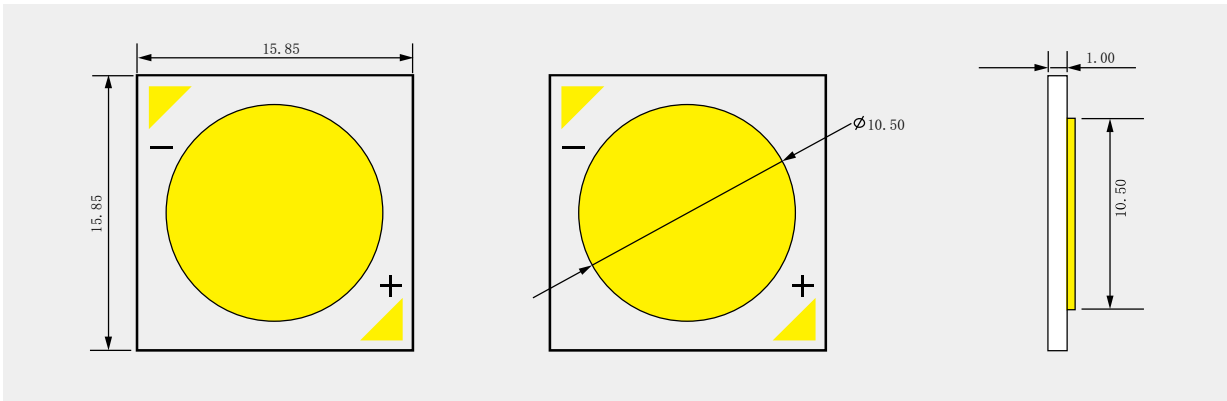


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP1616L07-0702W*****-0000	7	700-800	21-23	300	80/90/95+	2700K
CP1616L09-0902W*****-0000	9	900-1000	27-30	300		3000K
CP1616L12-1202W*****-0000	12	1200-1300	36-40	300		3400K
CP1616L15-1203W*****-0000	15	1500-1600	36-40	450		4000K
						5000K
						6500K

COB 1919 Series

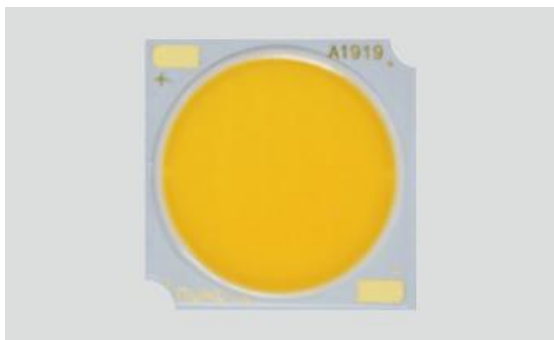

轨道灯
Track Light




Par灯
Par Light



筒灯
Downlight

Package Size

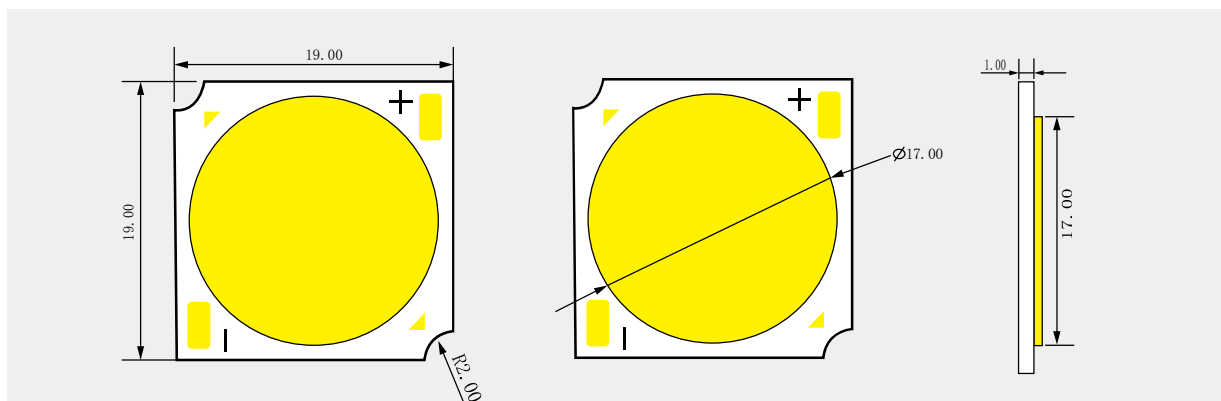

All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP1919L12-1202W*****-0000	12	1200-1300	36-40	300	80/90/95+	2700K 3000K 3400K 4000K 5000K 6500K
CP1919L18-1203W*****-0000	18	1800-1900	36-40	450		
CP1919L20-2002W*****-0000	20	2100-2200	60-65	300		
CP1919L22-1204W*****-0000	22	2300-2400	36-40	600		
CP1919L30-1205*****-0000	30	3100-3300	36-40	750		
CP1919L35-1206W*****-0000	35	3600-3800	36-40	900		
CP1919L40-1208W*****-0000	40	4100-4300	36-40	1200		

COB 2020 Series



轨道灯
Track Light




射灯
Spot Light



筒灯
Downlight



Package Size

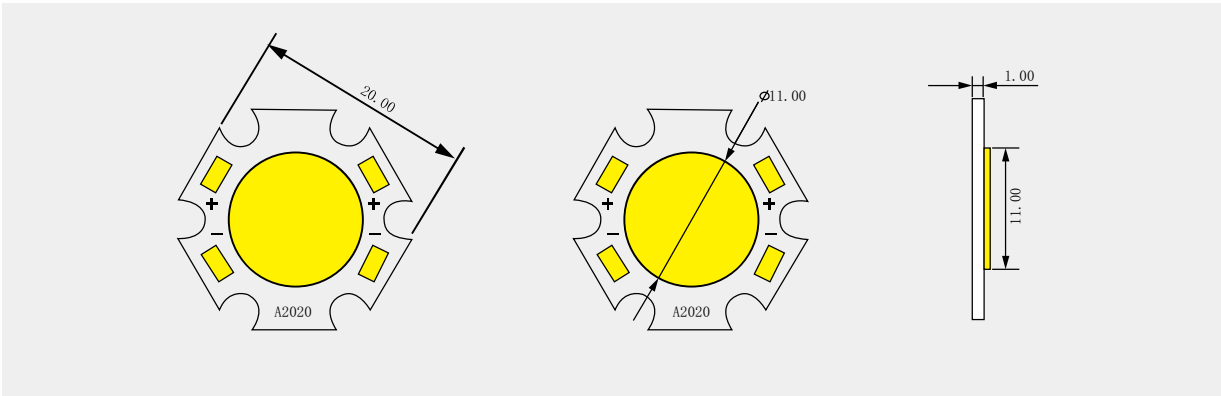

All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP2020L07-0702W*****-0000	7	700-800	21-23	300	80/90/95+	2700K
CP2020L09-0902W*****-0000	9	900-1000	27-30	300		3000K
CP2020L12-1202W*****-0000	12	1200-1300	36-40	300		3400K
CP2020L15-1203W*****-0000	15	1500-1600	36-40	450		4000K
						5000K
						6500K

COB 2424 Series



轨道灯
Track Light




Par灯
Par Light



筒灯
Downlight

Package Size

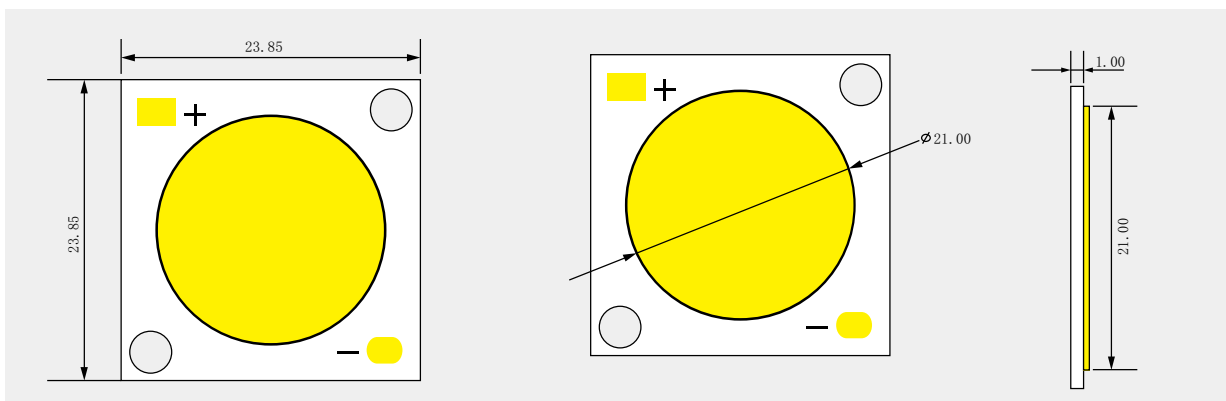


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP2424L22-1204W*****-0000	22	2300-2400	36-40	600	80/90/95+	2700K 3000K 3400K 4000K 5000K 6500K
CP2424L30-1205W*****-0000	30	3100-3300	36-40	750		
CP2424L35-1206W*****-0000	35	3600-3800	36-40	900		
CP2424L40-1208W*****-0000	40	4100-4300	36-40	1200		
CP2424L45-1209W*****-0000	45	4600-4800	36-40	1350		

COB 2522 Series

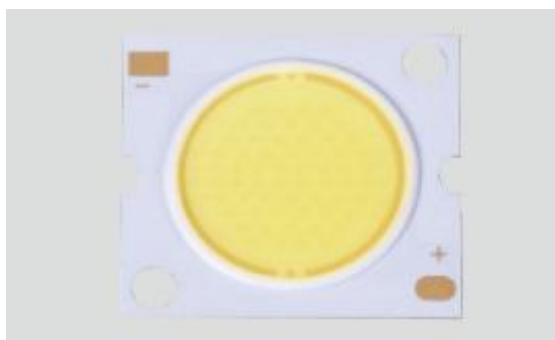


轨道灯
Track Light

Par灯
Par Light

筒灯
Downlight



Package Size

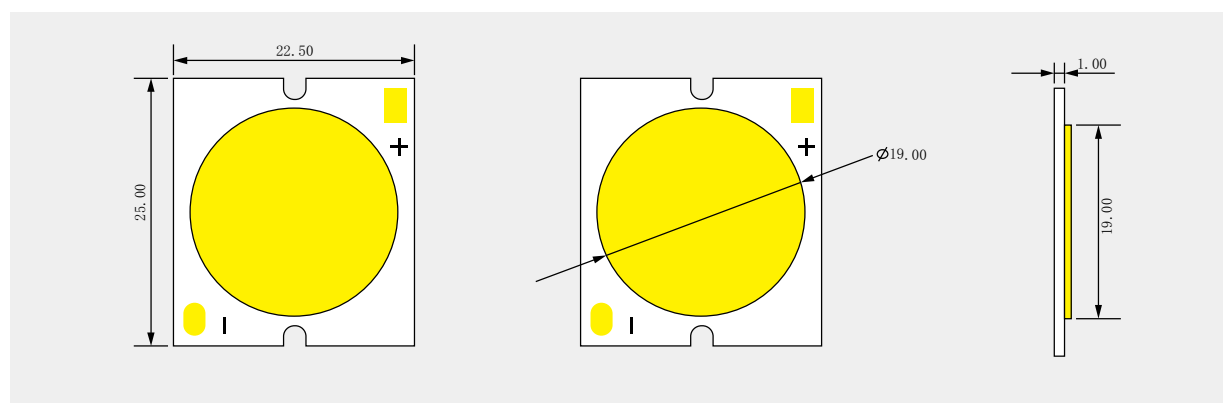


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP2522L18-1203W*****-0000	18	1800-1900	36-40	450	80/90/95+	2700K 3000K 3400K 4000K 5000K 6500K
CP2522L22-1204W*****-0000	22	2300-2400	36-40	600		
CP2522L30-1205W*****-0000	30	3100-3300	36-40	750		
CP2522L35-1206W*****-0000	35	3600-3800	36-40	900		
CP2522L40-1208W*****-0000	40	4100-4300	36-40	1050		

COB 2828 Series

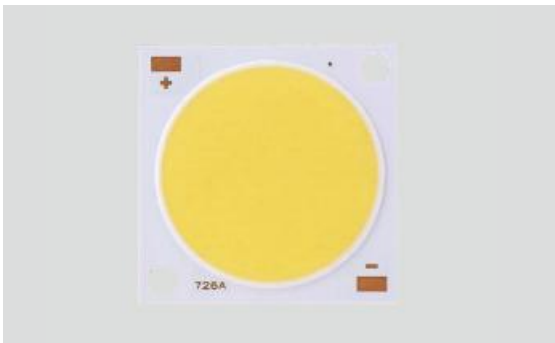

吊灯
ceiling lamp




斗胆灯
Beans Gall Light



投光灯
Cast light

Package Size

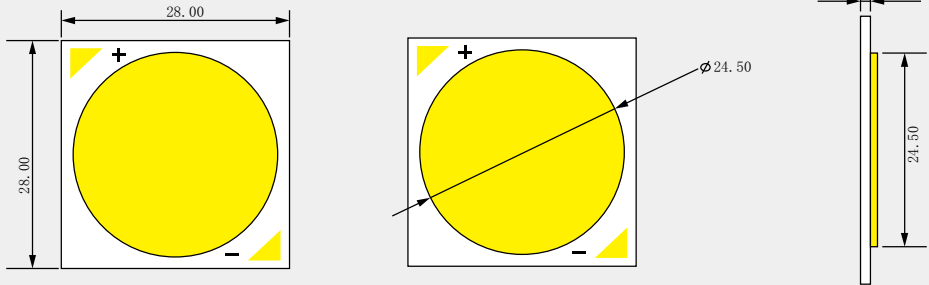


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
CP2828L35-1206W*****-0000	30	3100-3300	36-40	900	80/90/95+	2700K 3000K 3400K 4000K 5000K 6500K
CP2828L40-1208W*****-0000	40	4100-4300	36-40	1200		
CP2828L50-1210W*****-0000	50	5100-5300	36-40	1500		
CP2828L60-1212W*****-0000	60	6100-6300	36-40	1800		

COB 4046 Series

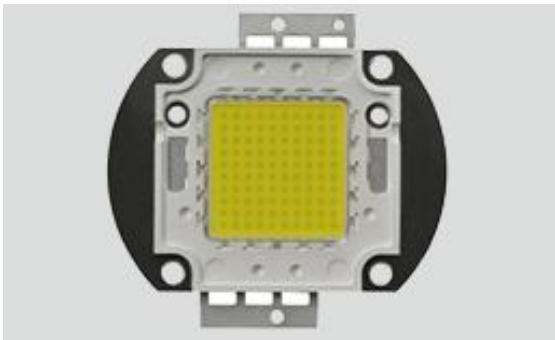

工矿灯
High-bay Lighting




投光灯
Cast Light



集成路灯
Street Light



Package Size

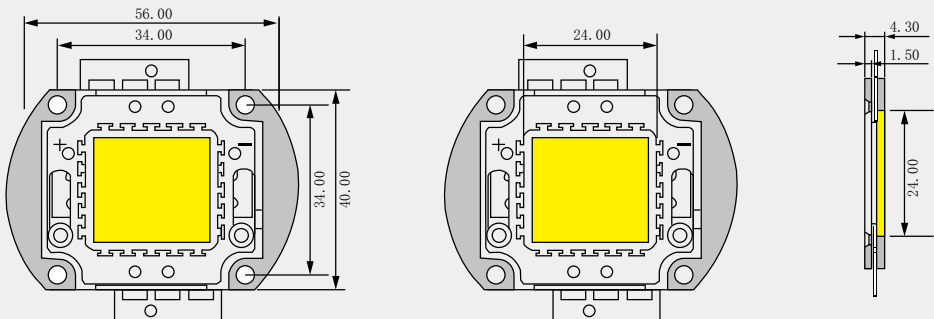


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Luminous Flux(lm)	Vf(V)	If(mA)	Ra	CCT(K)
JP4046T30-1003W29SQ5Q6EM2M7-0000	30	3000-4000	28-34	1050	70	2700K 3000K 3400K 4000K 5000K 6500K
JP4046T40-1004W41SQ7Q8EM2M7-0000	40	4000-5000	28-34	1400	70	
JP4046T50-1005W62GR0R0EM2M7-0000	50	5000-6000	28-34	1750	70	
JP4046T70-1007W29SR2R2EM2M7-0000	70	7000-8000	28-34	2450	70	
JP4046TA0-1010W41SS1S1EM2M7-0000	100	10000-12000	28-34	3500	70	


Down Light Module Series

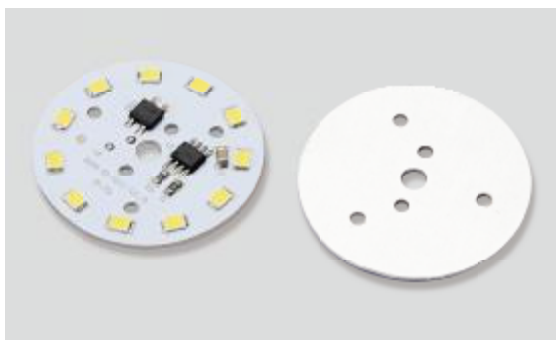

球泡灯1
Bulb

球泡灯2
Bulb

Package Size

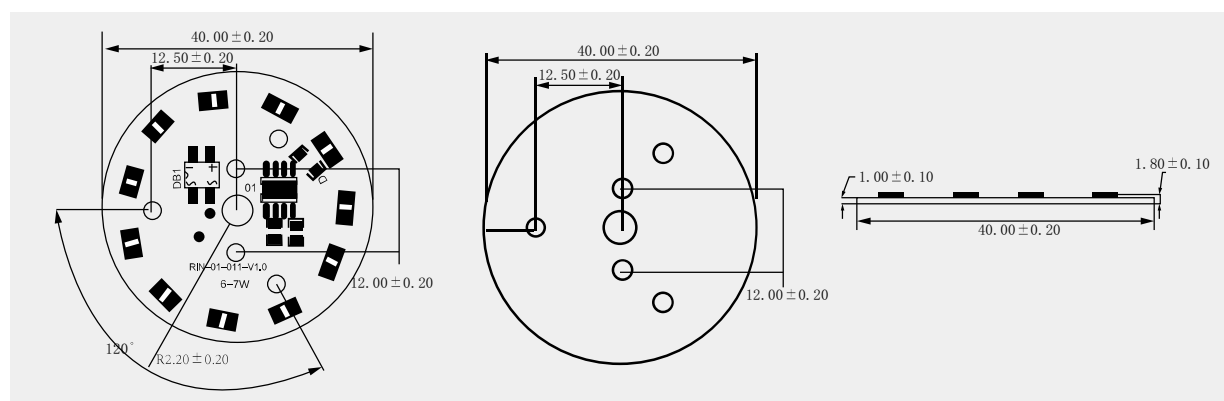


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Input Voltage (V)	PF	LED (pcs)	Luminous Flux(lm)	CCT(K)	Ra	Size (mm)
MQL00203-2864SG1H01101F-0000	3	200-240	≥0.9	11	270-310	2700-6500K	80	32
MQL00305-2864SG1H01101F-0000	5	200-240	≥0.9	11	400-450	2700-6500K	80	40
MQL00307-2864SG1H01101F-0000	7	200-240	≥0.9	11	490-550	2700-6500K	80	40
MQL00609-2864SG1H01102F-0000	9	200-240	≥0.9	22	700-750	2700-6500K	80	50
MQL00712-2864SG1H01102F-0000	12	200-240	≥0.9	22	960-1050	2700-6500K	80	55
MQL01015-2864SG1H01103F-0000	15	200-240	≥0.9	33	1200-1350	2700-6500K	80	80

Power Supply Free T8/T5 Series

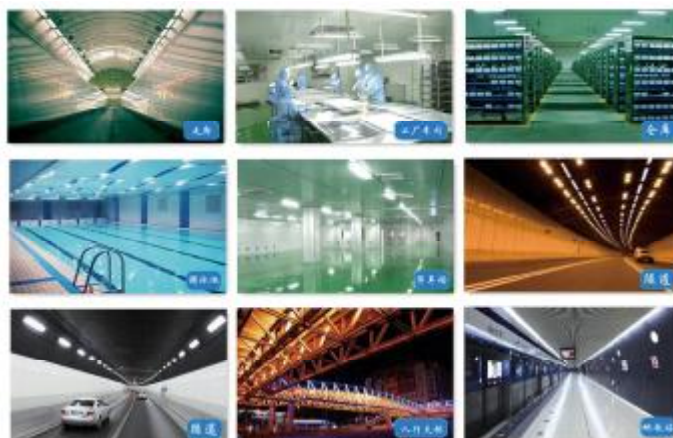


T5/T8



三防灯
Tri-proof light

Package Size

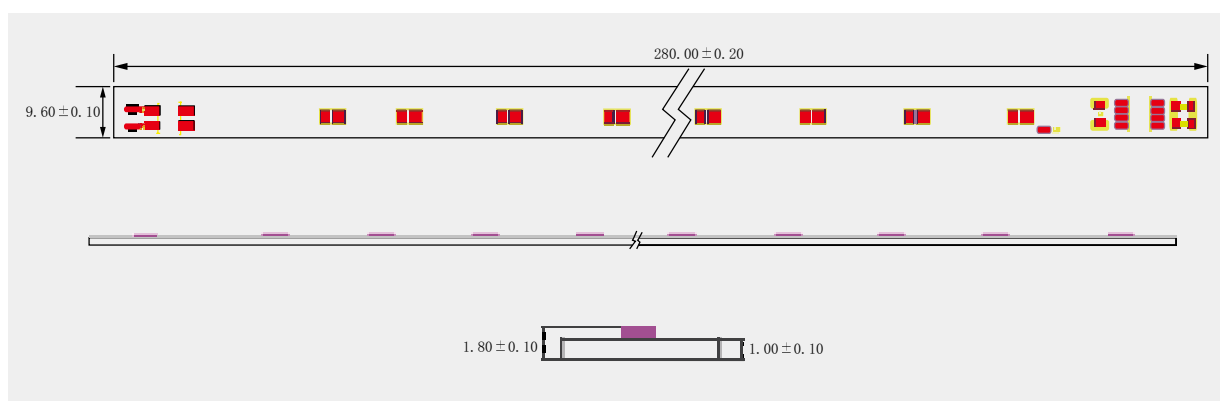

All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Input Voltage (V)	PF	LED (pcs)	Luminous Flux(lm)	CCT(K)	Ra	Size (mm)
MDL01605-2864SF3F31301F-0000	5	200-240	≥0.9	13	450-500	2700-6500K	80	280x9.6x1.0
MDL01709-2864SC2C27001F-0000	9	200-240	≥0.9	70	850-900	2700-6500K	80	570x9.6x1.0
MDL05212-2864SC2C27101F-0000	12	200-240	≥0.9	71	980-1080	2700-6500K	80	860x9.6x1.0
MDL01818-2864SC2C27002F-0000	18	200-240	≥0.9	140	1700-1800	2700-6500K	80	1160x9.6x1.0

Ceiling Light Module Series




吸顶灯1
Ceiling Light



吸顶灯2
Ceiling Light

Package Size

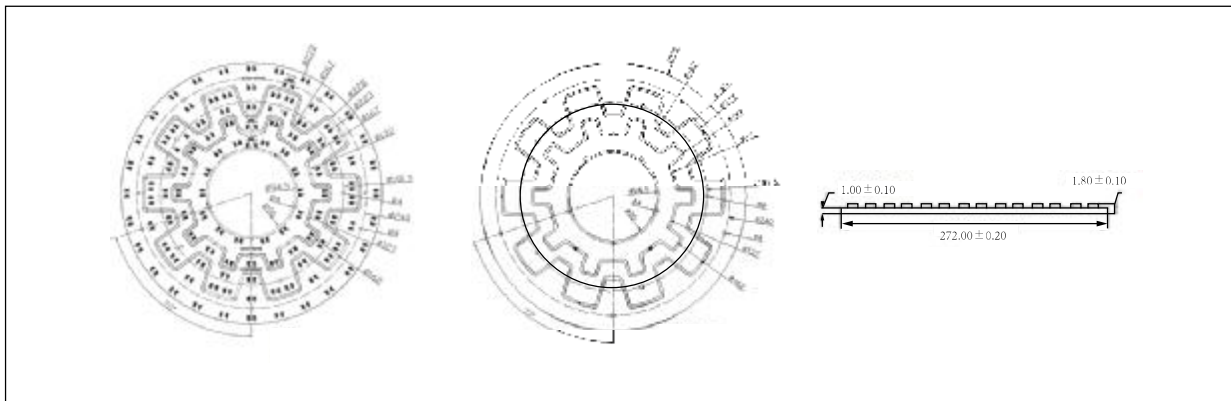


All dimensions are in millimeter

Parameter

Part Number	Watt(W)	Input Voltage (v)	If(mA)	LED (pcs)	Luminous Flux(lm)	CCT(K)	Ra	Size (mm)
MXL06415-2862GF2F22402F-0000	15	65-85	200	48	1600-1800	2700-6500K	80	φ 162*1.0
MXL06412-2864SF2F22401F-0003	2*12	65-85	2*150	48	2400-2600	2700-6500K	80	φ 162*1.0
MXL06118-2862GD1D22404F-0000	18	65-85	240	96	2200-2400	2700-6500K	80	φ 223*1.0
MXL06118-2864SF2F21804F-0003	2*18	50-65	2*300	72	3600-3900	2700-6500K	80	φ 223*1.0
MXL06324-2862GD1D22406F-0000	24	65-85	300	144	2600-2800	2700-6500K	80	φ 272*1.0
MXL06324-2864SF2F22404F-0003	2*24	65-85	2*300	96	4500-4800	2700-6500K	80	φ 272*1.0



IR3535 Series

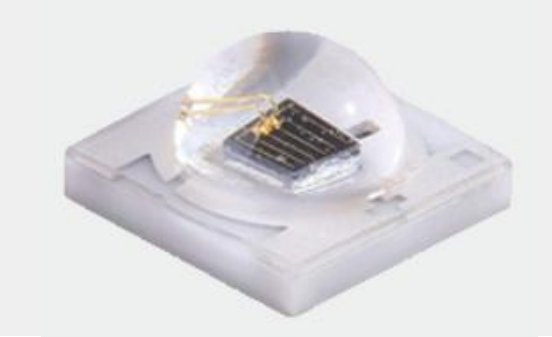


监控
Monitor



监控2
Monitor

Package Size

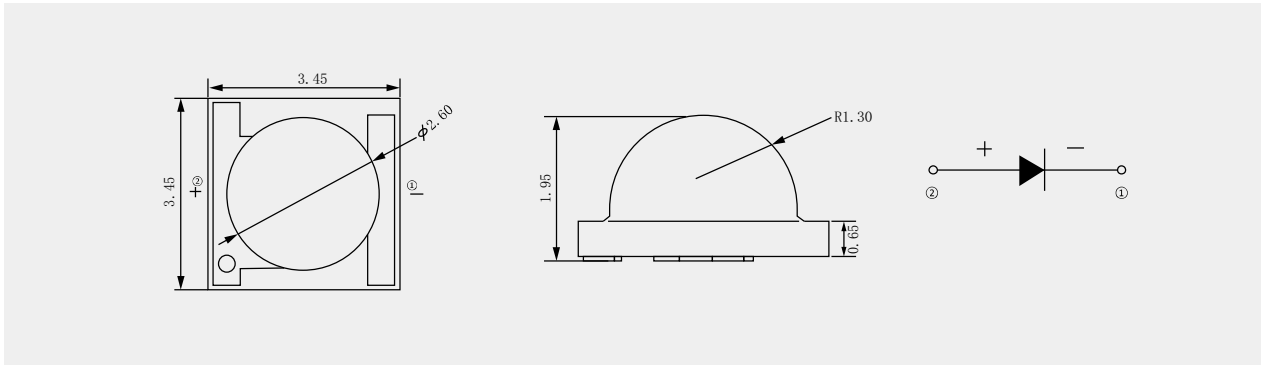

All dimensions are in millimeter

PD(SMD) Parameter

Part Number	If(mA)	oe(mw)	Wp(nm)	Vf(V)	2 θ 1/2
A3535C-I850L4L7AB0B3-0001	1000	600-800	830-870	2.0-2.4	120°
A3535C-I940L3L6ABOB3-0001	1000	550-750	930-950	2.0-2.4	120°

Lens2835 Series (Developing)



监控1
Monitor




监控2
Monitor



监控3
Monitor

Package Size

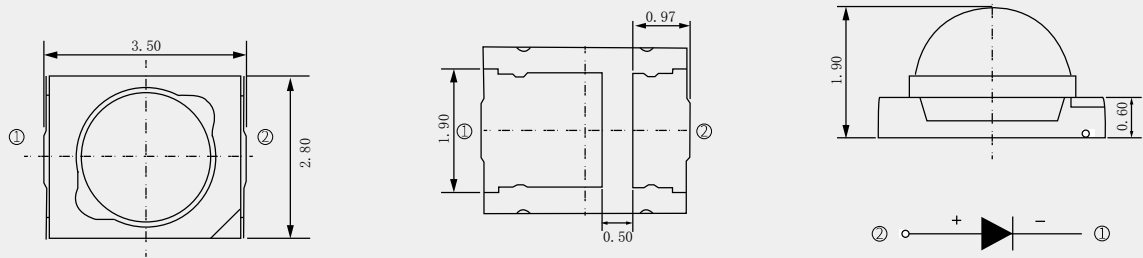

All dimensions are in millimeter

Parameter

Watt(w)	Luminous Flux(mw)	Vf(V)	If(mA)	Wp(nm)	Viewing Angle (°)
0.2	25~35	1.6	100	850	60
0.2	25~35	1.6	100	850	30

UV LED Series



美甲机
Manicure Machine




美牙仪器
Tooth Beauty
Instrument



油墨固化
Ink Curing



Package Size

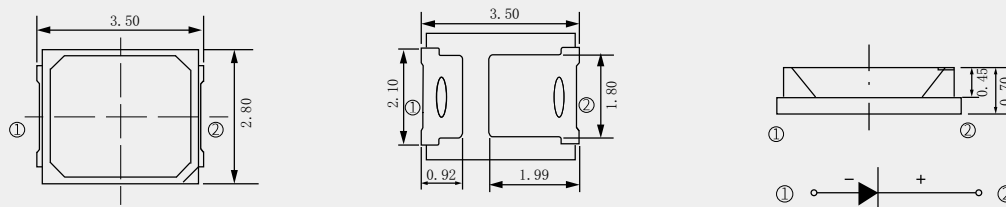


All dimensions are in millimeter

Parameter

Part Number	If(mA)	Watt(mw)	Wp(nm)	Vf(V)	2 θ 1/2
T2835F-P370BADBAB8C1-0000	60	0.5~3.5	365~375	3.3~3.7	120°
T2835F-P380LANBAB8C1-0000	60	16.5~42.5	375~385	3.3~3.7	120°
T2835F-P390NAPBAB5C0-0000	60	30~81.5	385~395	3.0~3.6	120°
T2835F-P400OAPBAB6C1-0000	60	41~81.5	395~405	3.1~3.7	120°
T2835F-P370HAJBAC1C5-0000	150	6.0~13.5	365~375	3.6~4.4	120°
T2835F-P380OQABAB9C2-0000	150	41~114	375~385	3.4~3.8	120°
T2835F-P390QARBAB7C2-0000	150	80~154	385~395	3.2~3.8	120°
T2835F-P400RASBAB6C1-0000	150	110~203	395~405	3.1~3.7	120°

UV3535 Series

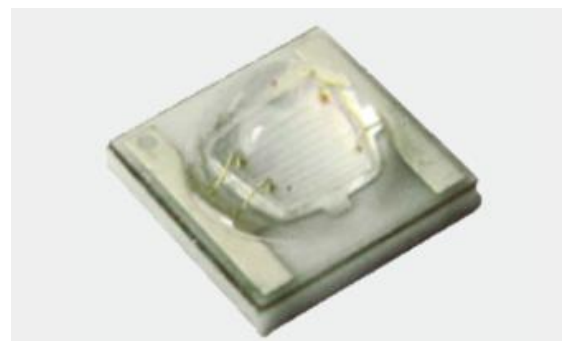

美甲机
Manicure Machine




美牙仪器
Tooth Beauty
Instrument



油墨固化
Ink Curing



Package Size

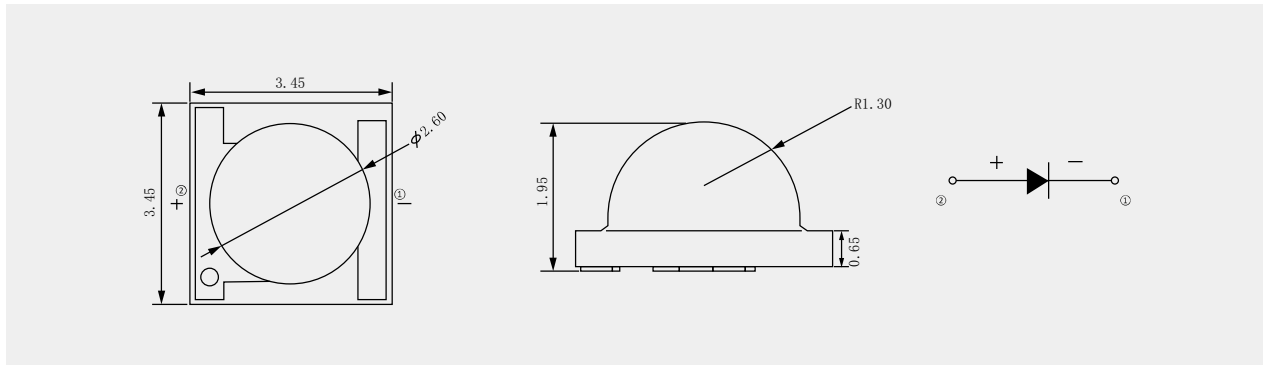

All dimensions are in millimeter

Parameter

Part Number	If(mA)	oe(mw)	Wp(nm)	Vf(V)	2 θ 1/2
A3535C-P380J1K2AC4C7-0001	500	180-310	380-390	3.4-3.8	120°
A3535C-I390L3M0AC4C7-0001	500	550-850	390-400	3.4-3.8	120°
A3535C-P400L3M0AC4C7-0001	500	550-850	400-410	3.4-3.8	120°
A3535C-P410L4M1AC4C7-0001	500	600-900	410-420	3.4-3.8	120°

Add: Building A15, Tantou the 4th Industrial Estate,
Songgang, BaoAn District, Shenzhen, China

Tel: (+86) 755 29785901

Fax: (+86) 755 29785685

E-mail: sal002@runlite.cn

Website: <http://www.runlite.cn>

Zip: 518100

